Vidikron Vision Model 30ET





Brief Introduction Beta 2.5	The Vision Model 30ET DLP projector from Vidikron has 1100 Ansi lumens, a contrast of 2150:1 and an HDTV 1280 x 720 resolution. The projector can illuminate a picture width of 337 cm well. However, if room light is available, the image width should ideally not exceed 225 cm. The model was built by Vidikron in 2005 and is no longer current.
Display Type	1 x DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1100 / Screen: 489 Lux (bei 200 cm Screen)
Contrast	Projector: 2150:1 / Screen: 2150:1
Black Level	Projector: 0,5116 min. Lumen / Screen: 0,228 min. Lumen
Offset	-
Resolution	HDTV 1280 x 720 921.600 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	210W NSH Lamp Articel Nr.: Ruby-LMP4821
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	-
Throw Ratio	1,88-2,45:1
Audio	-
Connections	HDMI in 5 x BNC in Cinch Video in YUV in S-Video in RS232C 12V Trigger
Ceiling Mounting	Yes
Power	310W
Size WxHxD	450,85 x 177,80 x 428,63 mm (17,8"x7"x16,9") 34,09 L/dm³
Operating Noise	-
Weight	14,29 kg / 31,5 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	45 fL / max. 337 cm screen width 154 cd/m²

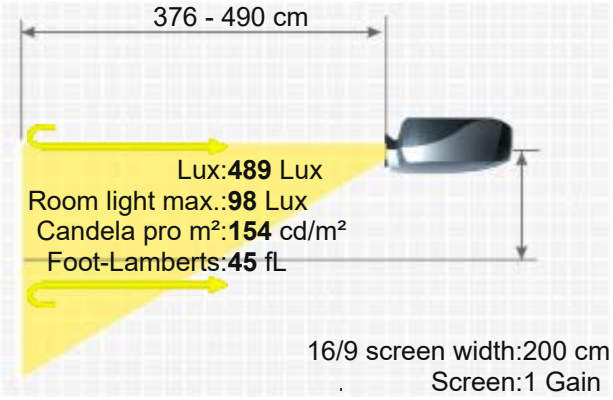

VIDIKRON VISION MODEL 30ET

Features	■ Gamma correction ■ Dynamic iris ■ Digital image shift ■ Picture-in-Picture ■ Overscan adjustable
Status	2005 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/vidikronvision30et-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.