
Viewsonic PJD6243



Brief Introduction Beta 2.5	The Viewsonic PJD6243 3D BrilliantColor DLP projector has 3200 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. The manufacturer Viewsonic specifies a service life of 3500 hours, which is over 4.8 years if enjoyed for two hours a day. 493 cm image width, the projector will be able to illuminate well. However, if room lighting is available, the picture width should ideally not exceed 329 cm. Playing 1080P is also no problem for the projector. The model was built by Viewsonic in 2012 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	3200
Projector: Contrast	3000:1 full on/off
Projector: Black Level	1,0667 min. Lumen
Projector: Offset	-
Screen	1067 Lux (bei 200 cm Screen)
Screen	3000:1 full on/off
Screen	0,356 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
3D Compatibility	Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	- Articel Nr.: RLC-075
Light Life	3500 h.5000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,11
Objective	-
Throw Ratio	1,9-2,1:1
Audio	1 x 5W
Connections	HDMI in 2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in USB Typ B RS232C Din 9 pin in RJ45 in Mini Jack Audio in und out
Ceiling Mounting	Yes
Power	315W
Size WxHxD	284 x 81,5 x 234,3 mm (11,2"x3,2"x9,2") 5,38 L/dm³
Operating Noise	34 / 32 dB in Eco Mode
Weight	2,60 kg / 5,73 lbs.
Keystone	Vert.: +/-40°
Illumination	85%



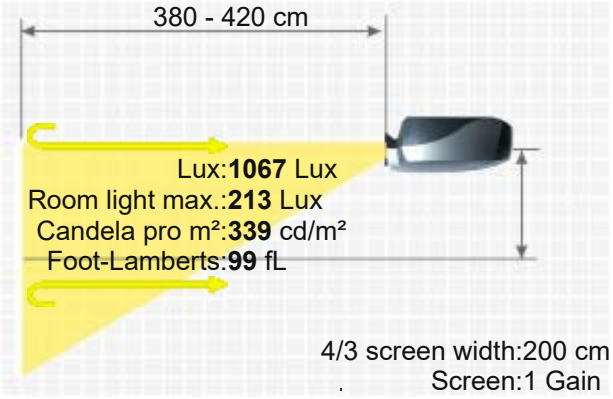

VIEWSONIC PJD6243

Frequenz	H-sync: 31-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	99 fL / max. 493 cm screen width 339 cd/m²
Features	■ Full HD 1080P compatible ■ Freeze ■ Eco Mode ■ Kensington Slot ■ BrilliantColor™ ■ Remote control with mouse control ■ Lan network compatible. ■ Crestron®-Software compatible. ■ 6-segment colour wheel. ■ digital zoom
Status Data	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/viewsonicpjd6243-en.html



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.