

CineVersum Astra-75K

CINEVERSUM ASTRA-75K



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution
Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power
Size WxHxD
Operating Noise

A brief introduction to the Astra-75K: The CineVersum Laser DLP projector offers 7,500 ANSI lumens, a contrast ratio of 100,000:1, and a UHD (4K2K) 3840 x 2160 resolution. Manufacturer CineVersum specifies a lifespan of 20,000 hours, which would equate to over 13.7 years at 4 hours per day. Horizontal and vertical keystone correction ensures effortless image setup.

1 x 0,47" DMD DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector 7500
100000:1 full on/off
0,0750 min. Lumen
Screen 3333 Lux (200 cm Screen width)
100000:1 full on/off
0,033 min. Lumen

UHD (4K2K) 3840 x 2160
8.294.400 Pixel / FHD E-Shift
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Very large screen width and rooms with plenty of light and shaded daylight.

Laser
20000 h.
0,00 € Laser

Powered
Powered
optional
optional


2x HDMI in und 1x out
2x 3D Sync in und out
3D IR out
USB-B in
2x USB-A in
RJ45 in

Yes, is possible.

600W

460 x 138 x 388 mm (18,1"x5,4"x15,3") 24,63 L/dm³

-

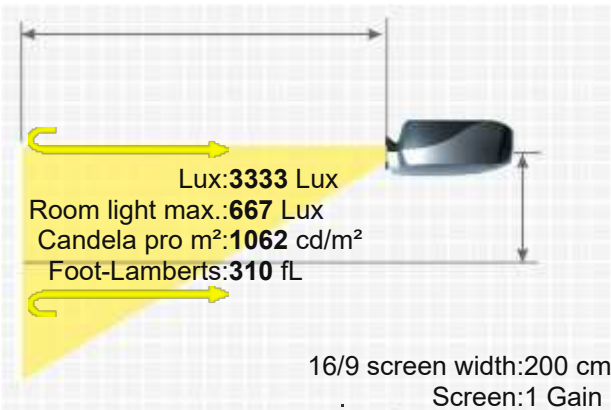

Weight	12,50 kg / 26,46 lbs.
Keystone	Vert.: +/-35°
Illumination	Hori.: +/-35°
	95%
Frequenz	-
Foot-Lamberts	310 fL / max. 702 cm screen width
	1062 cd/m²
Features	■ Full HD 1080P compatible
	■ User logo
	■ Eco Mode
	■ Kensington Slot
	■ Warping
	■ Password protection
	■ Lan network compatible.
	■ 9-Point Warping
	■ MEMC
	■ AI PQ Image Enhancement
Screen Mirroring	■ Multi-Screen Color Uniformity
	■ Refresh Rate: 120Hz @ 1080P, 60Hz @ 4K
	-



Optional accessories

	Deckenhalterung schwarz	Halterung45	83,60 €
---	-------------------------	-------------	---------

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
ML153	1.54-2.48:1	308-496 m	+/-100%	+/-40%	Powered
ML100	1-1.6:1	200-320 m	+/-100%	+/-40%	Powered
ML070	0.7-0.9:1	140-180 m	+/-100%	+/-40%	Powered
ML050	0.5:1	100 m	+/-100%	+/-40%	No Zoom

Status 2026 Current model // Last update of the data: 2026-06-29
Created: 2026-06-11 10:50:19

Data



More Details



HCinema

<https://www.projector-database.com/pro/cineversumastra75k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.