Vivitek D330MX



Brief Introduction Beta 2.5	The Vivitek D330MX standard portable BrilliantColor DLP projector has 3000 Ansi lumens, a contrast of 2500:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. In room light, the picture should be max. 318 cm wide. The model is also Full HD 1080P compatible. The model was built by Vivitek in 2010 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Projector Ansi-Lumen	3000
Contrast	2500:1 full on/off
Black Level Offset	1,2000 min. Lumen
Screen	1000 Lux (bei 200 cm Screen) 2500:1 full on/off 0,4 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	220W Lamp Articel Nr.: 5811116685-SU
Light Life	2000 h. 3000 h. in eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,16
Objective	F=2,5 f=21,3-24,5 mm
Throw Ratio	1,9-2,2:1
Audio	1W Mono
Connections	D-sub 15 pin in S-Video in Cinch Video in USB in Mini Jack Audio in
Ceiling Mounting	Yes
Power	280 / 230W in Eco Mode
Size WxHxD	220 x 71 x 178 mm (8,7"x2,8"x7") 2,78 L/dm³
Operating Noise	32 / 30 dB in Eco Mode

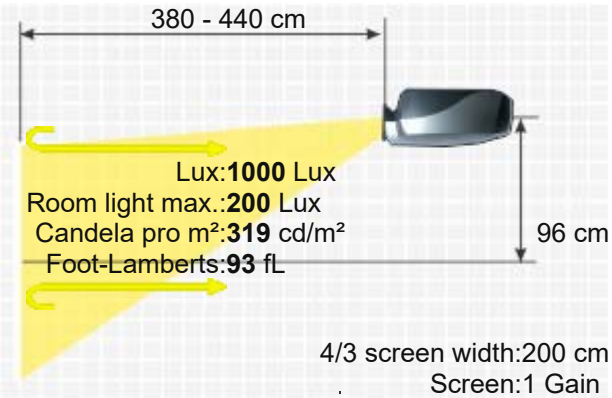

Key: 198 cm

VIVITEK D330MX

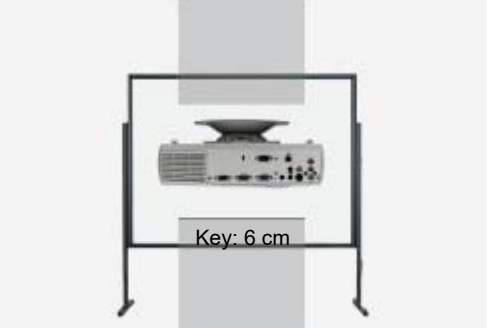

Weight	1,50 kg / 3,31 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	H-sync: 1,30-91,40 kHz V-sync: 43-87 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²

Features

- Full HD 1080P compatible
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Password protection
- BrilliantColor™
- Overscan adjustable

Optional

Lamp ruby	Ruby-LMP19805
Lamp original	5811116685-SU
Compatible lamp	LMP-K19804
Remote control original	5041849100
Ceiling Mount 100-120	Halterung100

Status: Order here: https://www.hcinema.de/lampen/shop-en.php?id=d19804
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema
https://www.projector-database.com/pro/vivitekd330mx-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.