
Wolf Cinema PRO-215 ST



Brief Introduction Beta 2.5	With the PRO-215 ST, manufacturer Wolf Cinema offers a short-throw DLP projector with HDTV 1920 x 1080 resolution and a contrast of 25000:1. With a projection ratio of just 0.49:1, this projector never gets in the way. For a 2m wide image, the projector needs to be just 98 cm away from the screen. With the HDMI MHL port, the smartphone image can be transmitted to the projector in Full HD at 60 Hz by screen mirroring and the smartphone is charged at the same time. It is also Full HD 1080P compatible. The model was built by Wolf Cinema in 2016 and is no longer current.
Display Type	1 x 0,65" DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3500 / Screen: 1556 Lux (bei 200 cm Screen)
Contrast	Projector: 25000:1 full on/off / Screen: 25000:1 full on/off
Black Level	Projector: 0,1400 min. Lumen / Screen: 0,062 min. Lumen
Offset	
Resolution	HDTV 1920 x 1080 2.073.600 Pixel UXGA 1600 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	190W Lamp Articel Nr.: WC-LPU215-ST
Light Life	3000 h. 7000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	0,49:1
Audio	-
Connections	2 x HDMI 1.4a mit MHL in D-sub 15pin in Mini Jack Audio out USB Typ B in
Ceiling Mounting	Yes
Power	309 / 249W in Eco Mode
Size WxHxD	315 x 114 x 224 mm (12,4"x4,5"x8,8") 8,04 L/dm³
Operating Noise	28 dB in Eco Mode

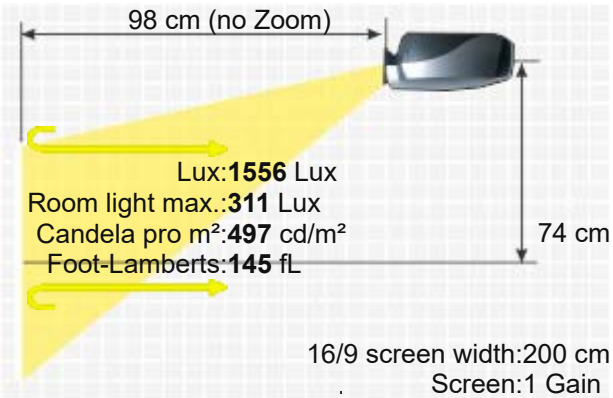

WOLF CINEMA PRO-215 ST

Weight	2,90 kg / 6,39 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15,37-91,1 kHz V-sync: 24-85 Hz
Foot-Lamberts	145 fL / max. 601 cm screen width 497 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ Short-throw projector ■ Crestron®-Software compatible.
Status	2016 Discontinued (EOL) // Last update of the data: 2023-09-20 Created: 2016-08-11 14:38:26
Data	
More Details	https://www.projector-database.com/pro/wolfcinemapro215-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.