
CTX PS 5110

Brief Introduction Beta 2.5	The Standard-Portabel CTX PS 5110 LCD projector has 1100 Ansi lumens, a contrast of 300:1 and an SVGA 800 x 600 resolution. The manufacturer specifies a lamp life of 4000 hours, which is equivalent to over 5.5 years at 2 hours per day. Due to the brightness of 1100 Ansi lumens, a picture width of 289 cm is possible. In room light, the picture should be max. 193 cm wide. The model is no longer offered by CTX. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.
Display Type	3 x TFT Panel SVGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	1100	356 Lux (bei 203 cm Screen)
Contrast	300:1 full on/off	300:1 full on/off
Black Level	3,6667 min. Lumen	1.199 min. Lumen

Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	PAL, NTSC und SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	- Lamp Articel Nr.: PS-5110
Light Life	4000 h.
Operating Costs	-
Focus	-
Zoom	-
Objective	-
Throw Ratio	-
Audio	-

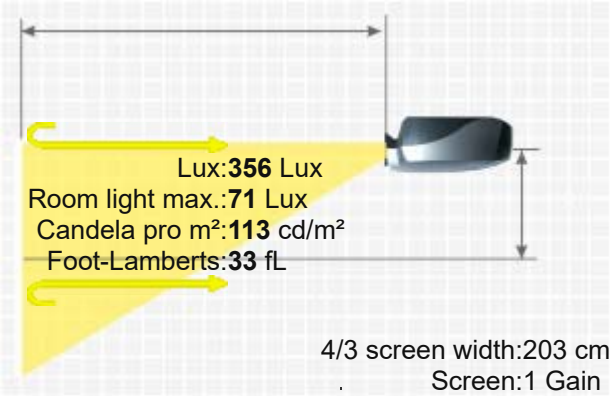

Connections	VGA USB Cinch Video in S-Video in Stereo Audio in
Ceiling Mounting	-
Power	-
Size WxHxD	325 x 92 x 250 mm (12,8"x3,6"x9,8") 7,48 L/dm³
Operating Noise	36dB
Weight	3,26 kg / 7,19 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	-
Foot-Lamberts	33 fL / max. 289 cm screen width 113 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

CTX PS 5110

More Details



HCinema

https://www.projector-database.com/pro/ctxps5110-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.