
CTX PS 6160

CTX PS 6160

Brief Introduction Beta 2.5	A brief introduction to the PS 6160: The CTX standard portable LCD projector offers 1600 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. 348 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 232 cm. It is no longer offered by the manufacturer CTX. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.
Display Type	3 x 0,9 TFT Panel XGA 4/3 Liquid Crystal Display
Projector Ansi-Lumen	1600
Contrast	400:1 full on/off
Black Level	4,0000 min. Lumen
Offset	-
Screen Ansi-Lumen	533 Lux (bei 200 cm Screen)
Contrast	400:1 full on/off
Black Level	1,343 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	TSC/NTSC 4.43, PAL B/D/G/H/I/K/L/N/M, SECAM B/D/G/H/K/L
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	- Lamp Articel Nr.: PS-6160
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	-
Throw Ratio	-
Audio	-
Connections	D-sub 15pin in 2 x Mini Jack in 2 x Audio in Cinch Video in S-Video in USB
Ceiling Mounting	Yes
Power	-
Size WxHxD	325 x 92 x 250 mm (12,8"x3,6"x9,8") 7,48 L/dm³
Operating Noise	36dB
Weight	3,26 kg / 7,19 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 30-90 kHz V-sync: 56-85 Hz
Foot-Lamberts	50 fL / max. 348 cm screen width 171 cd/m²
Features	-
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

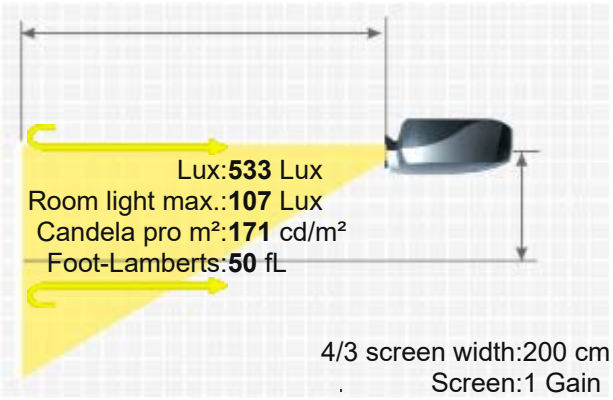

More Details

HCinema

https://www.projector-database.com/pro/ctxps6160-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.