CTX PS 6300




3LCD | Bild im Bild | Motor

Brief Introduction Beta 2.5	The CTX PS 6300 LCD projector has 3000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of up to 477 cm well thanks to the 3000 Ansi lumens. In room lighting, however, the image width should ideally be less than 318 cm. The model is no longer offered by CTX.
Display Type	3 x 1,3" TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	3000	971 Lux (bei 203 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level	7,5000 min. Lumen	2.446 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	HDTV,480p,720p,1080i,NTSC / NTSC4.43 / PAL / PAL-M / PAL-N / SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	250W NSH Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered
Objective	-
Throw Ratio	-
Audio	2 x 3W

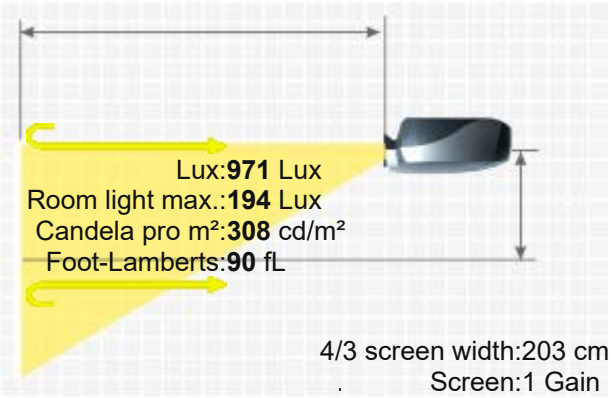

Connections	DVI in D-sub 15pin in und out Cinch Video in S-Video in Mini Jack in und out Maus in
Ceiling Mounting	Yes
Power	300W / 15W standby
Size WxHxD	274 x 140 x 422 mm (10,8"x5,5"x16,6") 16,19 L/dm³
Operating Noise	38dB
Weight	12,30 kg / 27,12 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	H-sync: 15,63-91 kHz V-sync: 50-100 Hz
Foot-Lamberts	90 fL / max. 477 cm screen width 308 cd/m²

CTX PS 6300

Features	■ Picture-in-Picture
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/ctxps6300-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.