
CTX PS 6400



Brief Introduction Beta 2.5	The PS 6400 LCD has 4000 Ansi-Lumen, a contrast of 400:1 and an XGA 1024 x 768 resolution. 551 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 367 cm would be recommended here. It is no longer offered by the manufacturer CTX.	
Display Type	3 x 1,3" TFT Panel XGA 4/3 Liquid Crystal Display	
Projector		
Ansi-Lumen	4000	
Contrast	400:1 full on/off	
Black Level	10,0000 min. Lumen	
Offset	-	
Screen		
Ansi-Lumen	1294 Lux (bei 203 cm Screen)	
Contrast	400:1 full on/off	
Black Level	3.26 min. Lumen	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed	
Video Modes	HDTV,480p,720p,1080i,NTSC / NTSC4.43 / PAL / PAL-M / PAL-N / SECAM	
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).	
Light Source	250W NSH Lamp Articel Nr.: LMP1032	
Light Life	2000 h.	
Operating Costs	-	
Focus	Powered	
Zoom	Powered	
Objective	-	
Throw Ratio	-	
Audio	2 x 3W	
Connections	DVI in D-sub 15pin in und out Cinch Video in S-Video in Mini Jack in und out Maus in	
Ceiling Mounting	Yes	
Power	300W / 15W standby	
Size WxHxD	274 x 140 x 422 mm (10,8"x5,5"x16,6") 16,19 L/dm³	
Operating Noise	38dB	

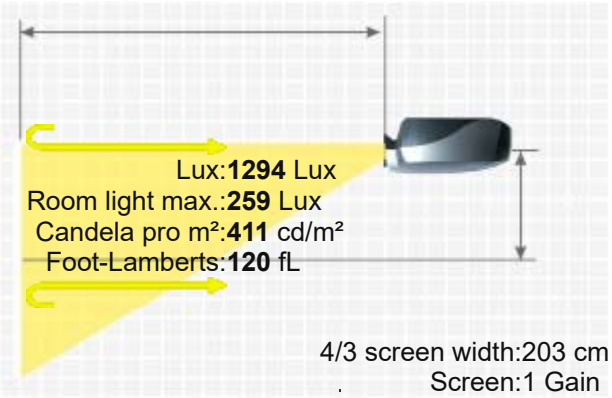

CTX PS 6400

Weight	12,30 kg / 27,12 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	H-sync: 15,63-91 kHz V-sync: 50-100 Hz
Foot-Lamberts	120 fL / max. 551 cm screen width 411 cd/m²
Features	■ Picture-in-Picture
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/ctxps6400-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.