
Davis Powerbeam II

Brief Introduction Beta 2.5	A brief introduction to the Powerbeam II: The Davis LCD projector offers 500 Ansi lumens, a contrast of 100:1 and a VGA 640 x 480 resolution. The projector will be able to illuminate an image width of 195 cm well. However, if room light is available, the image width should ideally not exceed 130 cm. The model is no longer offered by Davis. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.		
Display Type	1 x 8,4 LCD TFT Panel VGA 4/3 Liquid Crystal Display		
Projector		Screen	
Ansi-Lumen	500		162 Lux (bei 203 cm Screen)
Contrast	100:1 full on/off		100:1 full on/off
Black Level	5,0000 min. Lumen		1.67 min. Lumen
Offset	-		
Resolution	VGA 640 x 480 307.200 Pixel		
Video Modes	NTSC, PAL, NTSC 4,43		
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Very narrow picture width and rooms with very little light.		
Light Source	575W Metalldampf Lamp Articel Nr.: 2940050		
Light Life	1000 h.		
Operating Costs	-		
Focus	Manual		
Zoom	No Zoom		
Objective	-		
Throw Ratio	-		
Audio	2 x 12W		
Connections	Cinch Video in S Video Eingang		
Ceiling Mounting	-		
Power	-		
Size WxHxD	-		
Operating Noise	-		
Weight	-		
Keystone	-		
Illumination	-		
Frequenz	H-sync: 15,0-35,0 kHz V-sync: 50-90 Hz		
Foot-Lamberts	15 fL / max. 195 cm screen width 51 cd/m²		
Features	-		
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04		

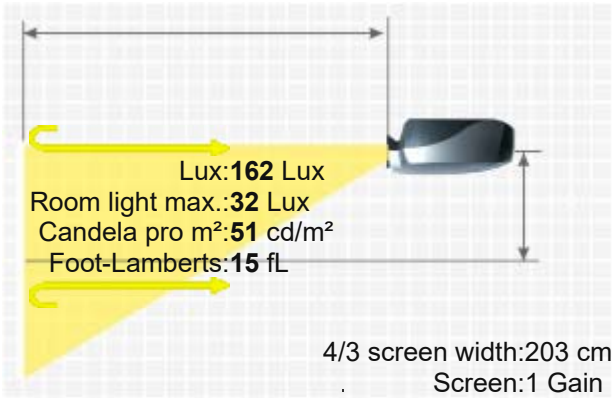

More Details

https://www.projector-database.com/pro/davispowerbeam2-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

DAVIS POWERBEAM II