
Davis Powerbeam III

Brief Introduction Beta 2.5	The stationary Powerbeam III LCD has 250 Ansi lumens, a contrast of 100:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 138 cm with its 250 Ansi lumens. In room lighting, however, the image width should ideally be less than 92 cm. The model is no longer offered by Davis. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.
Display Type	1 x 8,4 LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 250 / Screen: 81 Lux (bei 203 cm Screen)
Contrast	Projector: 100:1 full on/off / Screen: 100:1 full on/off
Black Level	Projector: 2,5000 min. Lumen / Screen: 0.835 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	NTSC, PAL, NTSC 4,43
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Very narrow picture width and rooms with very little light.
Light Source	575W Metalldampf Lamp Articel Nr.: 2940050
Light Life	1000 h.
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	-
Audio	2 x 12W
Connections	Cinch Video in S Video Eingang
Ceiling Mounting	-
Power	-
Size WxHxD	-
Operating Noise	-
Weight	-
Keystone	-
Illumination	-
Frequenz	H-sync: 15,0-50,0 kHz V-sync: 50-90 Hz
Foot-Lamberts	8 fL / max. 138 cm screen width 27 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

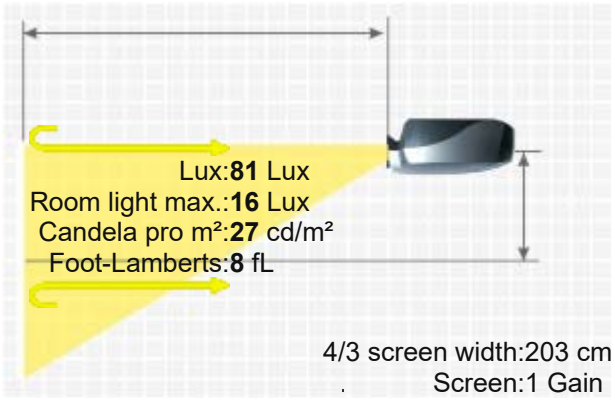

More Details

HCinema

https://www.projector-database.com/pro/davispowerbeam3-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

DAVIS POWERBEAM III