
Delta V3180A

USB

Brief Introduction Beta 2.5	The V3180A LCD has 1700 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 359 cm well. However, if room light is available, the image width should ideally not exceed 239 cm. This model is no longer offered by Delta.
Display Type	0,9 psi TFT Panel XGA 4/3 Liquid Crystal Display
Projector Ansi-Lumen	1700
Contrast	400:1 full on/off
Black Level	4,2500 min. Lumen
Offset	-
Screen	550 Lux (bei 203 cm Screen) 400:1 full on/off 1.386 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV 480p 720p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	-
Throw Ratio	-
Audio	1 x 3W Stereo
Connections	Cinch Video in Srereo Cinch Eingang S-Video in USB Eingang 1 x D-sub 15pin in 1 x VGA Ausgang
Ceiling Mounting	Yes
Power	-
Size WxHxD	348 x 99 x 276 mm (13,7"x3,9"x10,9") 9,51 L/dm³
Operating Noise	35dB
Weight	3,27 kg / 7,21 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	-
Foot-Lamberts	51 fL / max. 359 cm screen width 175 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

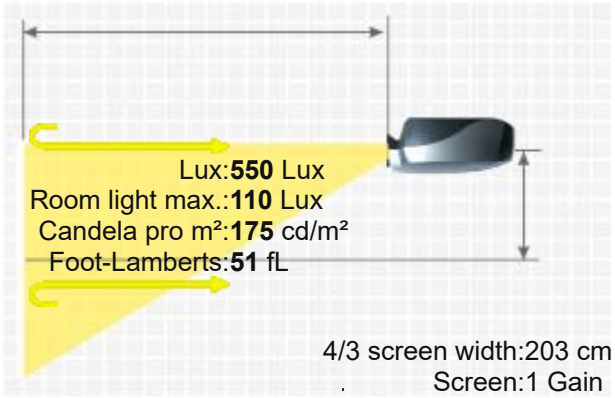

DELTA V3180A

More Details

HCinema

https://www.projector-database.com/pro/deltav3180a-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.