

Digital Projection TITAN WUXGA 3D



Brief Introduction

Beta 2.5

A brief introduction to the Digital Projection TITAN WUXGA 3D. The DLP projector has a WUXGA 1920 x 1200 resolution and a contrast of 2000:1. An image width of up to 718 cm is possible as the projector has 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. Playing 1080P and 3D is also no problem for the projector. On the market since 2010, the model is no longer offered by the manufacturer Digital Projection, but is still very popular in our projector database.

Display Type



3 x 12 Grad DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5000

2222 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

2,5000 min. Lumen

1,112 min. Lumen

Offset

-

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

-

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

DVI in
D-sub 15 pin in
5 x BNC RGBHV in
YUV über BNC in
BNC Video in
RJ45 in
RS232C

Ceiling Mounting

Yes, is possible.

Power

580W

Size WxHxD

543,5 x 253,5 x 645,4 mm (21,4"x10"x25,4") 88,61 L/dm³

Operating Noise


42dB

Weight

31,00 kg / 68,34 lbs.

Keystone

-

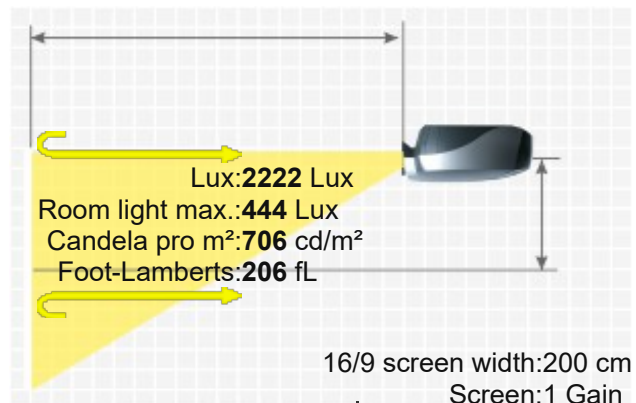

Illumination	87%
Frequenz	H-sync: 15-100 kHz V-sync: 24-85 Hz
Foot-Lamberts	206 fL / max. 718 cm screen width 706 cd/m²
Features	Real Full HD 3D Full HD 1080P compatible Freeze Gamma correction Password protection Lan network compatible.
Screen Mirroring	-

Optional accessories			
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
109-236	1.16-1.87:1	2.3-3.7 m	70-50%	+/-18.75%	Powered
109-235	6.92-10.36:1	13.8-20.7 m	70-50%	+/-18.75%	Powered
105-613	4.16-6.96:1	8.3-13.9 m	70-50%	+/-18.75%	
105-612	2.56-4.16:1	5.1-8.3 m	70-50%	+/-18.75%	Powered
105-611	1.87-2.56:1	3.7-5.1 m	70-50%	+/-18.75%	Powered
105-610	1.39-1.87:1	2.8-3.7 m	70-50%	+/-18.75%	Powered
Fix Optional Lenses					
105-609	1.12:1	2.2 m	70-50%	+/-18.75%	
105-608	1.12:1	2.2 m	70-50%	+/-18.75%	No Zoom
105-607	0.67:1	1.3 m	+/-10%	+/-10%	No Zoom

Status

2010 Discontinued (EOL) // Last update of the data: 2025-03-03

Data

More Details



HCinema

<https://www.projector-database.com/pro/digitalprojectiontitanwuxga3d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.