


# Dukane ImagePro 6773UL-W

DUKANE IMAGEPRO 6773UL-W

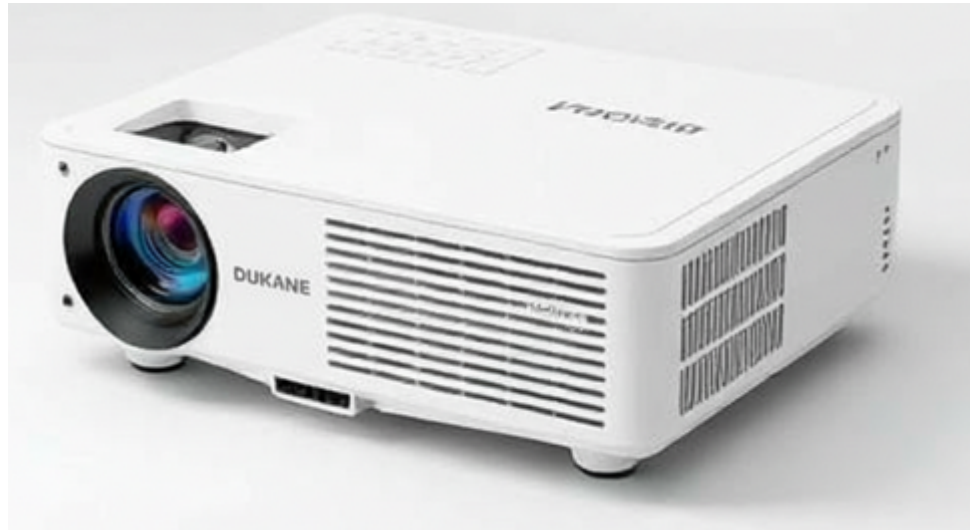

Brief introduction to the Dukane ImagePro 6773UL-W. The LCD laser projector has a WUXGA 1920 x 1200 resolution and a contrast ratio of 3000000:1 dynamic contrast. It is a laser projector with a light life of 20,000 hours, which equates to over 13.7 years at 4 hours per day. The lens shift function allows the projector to be set up very freely. An image width of up to 744 cm is possible, as the projector has 7300 ANSI lumens. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 496 cm. Playing 1080P and 4K (compressed) is also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection.

 3 x LCD Panel  
WUXGA 16/9 Liquid Crystal Display

|                  |                            |               |                                |
|------------------|----------------------------|---------------|--------------------------------|
| <b>Projector</b> | 7300                       | <b>Screen</b> | 3244 Lux (200 cm Screen width) |
|                  | 3000000:1 Dynamic Contrast |               | 3000000:1 Dynamic Contrast     |
|                  | 0,0024 min. Lumen          |               | 0,001 min. Lumen               |

Vert.: +50% -10% Hori.: +/-20%  
WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K+2K) 4096 x 2160 compressed

Video Modes: Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Application: Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source: Dual Blue Laser

Light Life: 20000 h.

Operating Costs: 0,00 € Laser

Focus: Powered


Zoom: Powered

Objective: optional

Throw Ratio: optional

Audio: -

Connections: 2x HDMI 2.0 (HDCP 1.4/2.2)  
D-sub 15pin in und out  
Cinch Video in  
Cinch Stereo in  
Mini Jack Audio out  
USB in  
RS232C Din 9 pin in  
RJ45 in

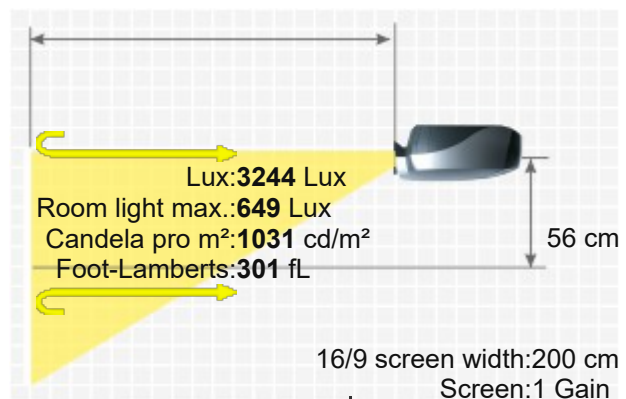

Brief Introduction  
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

HDBaseT  
Yes, is possible.  
456W Normal / 412W Eco  
503 x 168 x 411 mm (19,8"x6,6"x16,2") 34,73 L/dm³  
40 / 31 dB in Eco Mode

Weight  
Keystone  
Illumination

11,20 kg / 24,25 lbs.  
Vert.: +/-30°  
Hori.: +/-40°  
-

Frequenz

-


Foot-Lamberts

301 fL / max. 744 cm screen width  
1031 cd/m²

- Features
- Full HD 1080P compatible
  - Lens shift Funktion
  - Eco Mode
  - Kensington Slot
  - 360° installable
  - Lan network compatible.
  - Crestron®-Software compatible.
  - AMX
  - Geometric Correction (Spheres, Cylinders, Corner, Angles)

Screen Mirroring

-

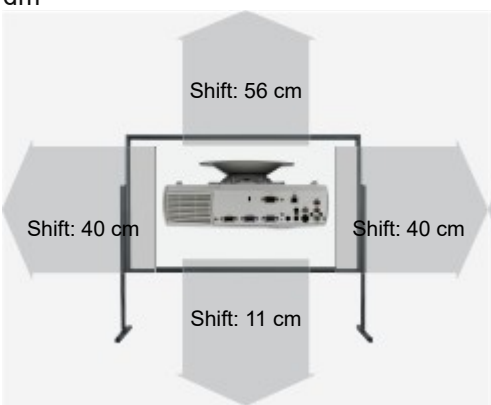

Optional accessories

|                                                                                 |                              |             |         |
|---------------------------------------------------------------------------------|------------------------------|-------------|---------|
|  | Deckenhalterung Länge 225 mm | Halterung45 | 83,60 € |
|---------------------------------------------------------------------------------|------------------------------|-------------|---------|

Optional Lenses

| Name   | Ratio                                                                                     | Distance | Shift V | Shift H | Zoom |
|--------|-------------------------------------------------------------------------------------------|----------|---------|---------|------|
| Status | 2026 Current model // Last update of the data: 2026-03-02<br>Created: 2026-02-18 11:26:30 |          |         |         |      |



More Details



# HCinema

<https://www.projector-database.com/pro/dukaneimagepro6773ulw-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.