
Dukane ImagePro 8050




3LCD | Bild im Bild | Motor | Pointer

Brief Introduction Beta 2.5	The standard portable Dukane ImagePro 8050 LCD projector has 2000 Ansi lumens, a contrast of 200:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 389 cm thanks to the 2000 Ansi lumens. In room light, however, the image width should ideally be less than 259 cm. This model is no longer offered by Dukane.
Display Type	3 x 1,3" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	2000
Projector: Contrast	200:1 full on/off
Projector: Black Level Offset	10,0000 min. Lumen
Screen	647 Lux (bei 203 cm Screen)
Screen	200:1 full on/off
Screen	3.285 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel
Video Modes	NTSC, PAL, SECAM NTSC 4.3
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	190W UHB Lamp Articel Nr.: 456-206
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,2
Objective	F=1,7-2,3 f=49-64 mm
Throw Ratio	1,85-2,42:1
Audio	1 x 1W Stereo
Connections	15 pin VGA, S-Video, Composite Video, Audio für video **Outputs:** 15 Pin Monitor out, 1 audio stereo mini jack
Ceiling Mounting	Yes
Power	320W
Size WxHxD	189 x 119 x 245 mm (7,4"x4,7"x9,6") 5,51 L/dm³
Operating Noise	-
Weight	5,90 kg / 13,01 lbs.
Keystone	Vert.: +/-10°
Illumination	-
Frequenz	H-sync: 25-80 kHz V-sync: 56-120 Hz
Foot-Lamberts	60 fL / max. 389 cm screen width



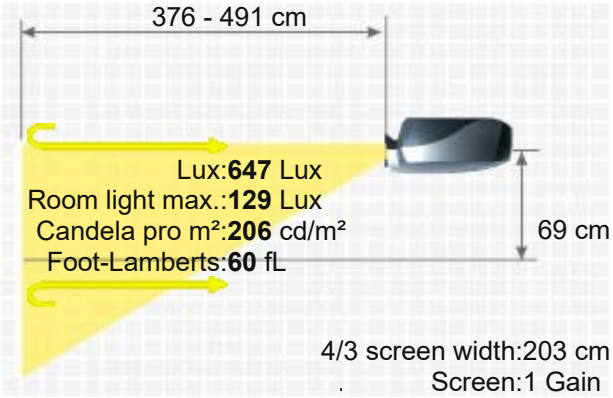

DUKANE IMAGEPRO 8050



206 cd/m²

Features
- Gamma correction
- Picture-in-Picture
- Remote control with laser pointer
- 2 x digital zoom

Status
- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details

https://www.projector-database.com/pro/dukaneimagepro8050-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.