# 8404

## ImagePro 8404 Portable DLP Projector




*The ImagePro 8404 is a bright (2600 lumens) versatile DLP projector with Brilliant Color™, and HDTV compatible*

**8404 FEATURES**

- 2600 lumen brightness
- XGA resolution (1024 X 768)
- Brilliant Color™ DLP Technology
- Filter Free Design
- Contrast ratio of 2200 to 1
- Lamp life of 3000/4000 hours
- HDTV ready, HDCP input
- Audio pass-through for volume control when operating
- Dukane 5-Year Warranty
- Control, diagnosis and email alerts over the network, RJ-45 port

THE ALL NEW

**DUKANE**

***Education. Presentation. Inspiration.***

www.dukcorp.com

**Convey**
SOLUTIONS
Dukane's Connected Classroom

Convey by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA.


Visit www.convasystemscom.

Call Dukane: 800-676-2485

# ImagePro 8404
# Portable DLP projector

Back Panel

**Connections**

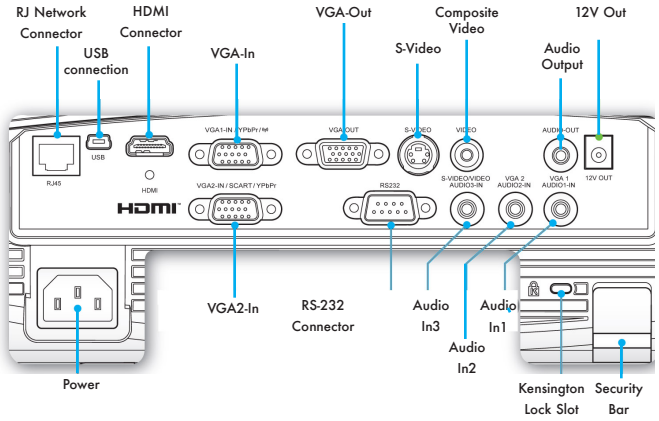


## FEATURES

- XGA (1024 x 768) resolution
- 2600 ANSI lumens of brightness
- 2200:1 contrast ratio
- Status, control and maintenance over the network
- 5 Watt X 2 Speakers• Brilliant color images
- Vertical keystone correction
- Only 6.4 lbs.
- No filter to service
- Easy lamp replacement through top door
- Controllable remotely
- Lamp life of 3000/4000 hours
- 5-Year Warranty

### 8404 Projection Table

| Image Size 4:3 | | Throw Distance | |
|---|---|---|---|
| Diagonal | Width | Min. | Max. |
| Inches | Inches | Feet | Feet |
| 40 | 32 | 4.3 | 5.1 |
| 60 | 48 | 6.4 | 7.7 |
| 80 | 64 | 8.5 | 10.2 |
| 100 | 80 | 10.6 | 12.8 |
| 120 | 96 | 12.8 | 15.4 |

Throw Ratio (distance to width) to 1.6 1.92

| **Specifications** | **8404** |
|---|---|
| Image Element | 0.55" DND DLP "Brilliant Color" |
| Brightness | 2600 ANSI lumens (2100 econo mode) |
| Resolution | 1024 x 768 pixels (H X V), XGA |
| Contrast | 2,200:1 |
| Scanning Frequency | fh 15-91 kHz, fv 25-85 Hz |
| Lens | Manual zoom, 1.2X |
| Lens Throw Ratio | 1.6 -1.92 throw distance to image width |
| Keystone Correction | Digital vertical +/-40° |
| Aspect Ratio | 4:3 native, 16:9 selectable |
| Computer Compatibility | VGA, SVGA, XGA, SXGA,UXGA<br>Mac 13", Mac 16" |
| Video Compatibility | NTSC, PAL, PAL-M<br>SECAM, HDTV1080i/p, 720p, 480i/p, |
| Closed Caption | CC1, CC2 |
| Projection Modes | Front/rear/ceiling |
| Color Reproduction | 1.07 billion colors |
| Lamp | 180W, VIP |
| Lamp Life | 3000 hours (4000 hours econo mode) |
| Audio | Two 5 watt spakers |
| Throw Distance | 4 to 33' |
| Screen Size, diagonal | 30" to 300" |
| Inputs, Video | (1) S-video, Min DIN 4-pin,<br>(1) Composite video, RCA x 1<br>(1) Audio, Stereo, Mini jack |
| Inputs, Computer | (1) RGB Signal: D-sub, 15 pin, component<br>(1) HDMI<br>(2) Audio, Stereo mini jack |
| LAN Connection | (1) LAN, RJ-45 |
| Outputs Monitor | 15 pin, D-sub |
| Outputs Audio | Audio, Stereo mini jack x 1 |
| Outputs, Other | DB9, RS232<br>USB type B (remote mouse only) |
| Security | Kensington slot, security bar, keypad lock |
| Fan Level | 34dB, (29dB in econo mode) |
| Operating Temperature | 41 to 104 deg. F (5-40 deg C) |
| Power | AC 100-120V, AC220-240V<br>50/60 Hz, 255 watt |
| Size (WxHxD) | 12.8" x 3.8" x 9.2" |
| Weight | 6.4 lbs. (2.9 kg) |
| Carton Size | 15" x 15" x 9" |
| Shipping Weight | 12 lbs. |
| Accessories Included | Remote control, batteries (AA), power cord, Computer cable, User manual, lens cap |
| Safety | FCC, CUL |
| Optional Accessories | Lamp 456-8404<br>Ceiling mount, universal, RPA-U or PRG-UNV |

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

THE ALL NEW DUKANE
Education. Presentation. Inspiration.


Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
866-265-4298 toll-free
630-584-5156 fax
avsales@dukcorp.com e-mail
www.dukcorp.com/av


Spec: Subject to change



ImagePro is a registered trademark of Dukane Corporation

5YR