8406

ImagePro 8406 Portable DLP Projector



The ImagePro 8406 is a bright (3500 lumens) versatile DLP projector with Brilliant Color™ and HDTV compatible

8406 FEATURES

- 3500 lumen brightness
- XGA resolution (1024 X 768)
- Brilliant Color™ DLP Technology
- Filter Free Design
- Contrast ratio of 2500 to 1
- Lamp life of 3000/4000 hours
- HDTV ready, HDMI input
- Audio pass-through for volume control when operating
- Dukane 5-Year Warranty
- Control, diagnosis and email alerts over the network, RJ-45 port

THE ALL NEW DUKANE

Education. Presentation. Inspiration.

Toll-free: 866-280-4298 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com


Convey SOLUTIONS

Convey by Dukane delivers control of classroom audio visual assets in sync with our Convey AClick Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com. Call Dukane: 866.280.4298

ImagePro 8406
Portable DLP projector

Back Panel

Connections

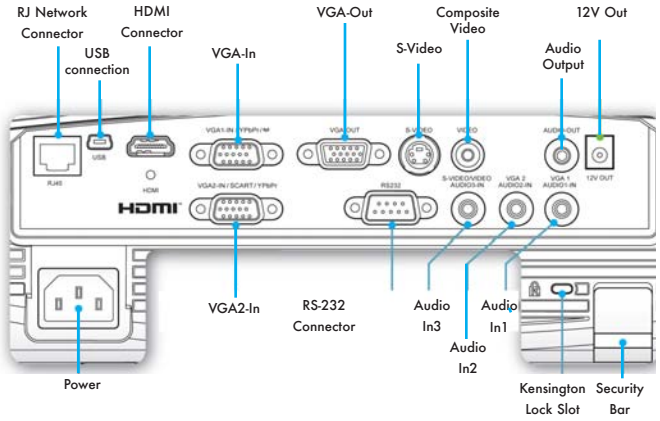

FEATURES

- XGA (1024 x 768) resolution
- 3500 ANSI lumens of brightness
- 2500:1 contrast ratio
- Status, control and maintenance over the network
- 5 Watt X 2 Speakers
- Brilliant color images
- Vertical keystone correction
- Only 6.4 lbs.
- No filter to service
- Easy lamp replacement through top door
- Controllable remotely
- Lamp life of 3000/4000 hours
- 5-Year Warranty

8406 Projection Table

Image Size 4:3		Throw Distance	
Diagonal Inches	Width Inches	Min. Feet	Max. Feet
40	32	5.2	5.7
60	48	7.8	8.6
80	64	10.4	11.5
100	80	13.0	14.3
120	96	15.6	17.4
Throw Ratio (distance to width):		1.95	2.15

Specifications	**8406**
Image Element	0.55" DND DLP "Brilliant Color"
Brightness	3500 ANSI lumens (2100 econo mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	2,500:1
Scanning Frequency	fh 15-91 kHz, fv 25-85 Hz
Lens	Manual zoom, 1.2X
Lens Throw Ratio	1.95 – 2.15 throw distance to image width
Keystone Correction	Digital vertical +/-40°
Aspect Ratio	4:3 native, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, SXGA,UXGA Mac 13", Mac 16"
Video Compatibility	NTSC, PAL, PAL-M SECAM, HDTV1080i/p, 720p, 480i/p,
Closed Caption	CC1, CC2
Projection Modes	Front/rear/ceiling
Color Reproduction	1.07 billion colors
Lamp	230W P-VIP
Lamp Life	3000 hours (4000 hours econo mode)
Audio	Two 5 watt speakers
Throw Distance	4 to 33'
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (1) Audio, Stereo, Mini jack
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin, component, video shared (1) HDMI (2) Audio, Stereo mini jack
LAN Connection	(1) LAN, RJ-45
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Other	DB9, RS232 USB type B (remote mouse only)
Security	Kensington slot, security bar, keypad lock
Fan Level	34dB, (29dB in econo mode)
Operating Temperature	41 to 104 deg. F (5-40 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 328 watt
Size (WxHxD)	13" x 4" x 9"
Weight	6.4 lbs. (2.9 kg)
Carton Size	13" x 7" x 19"
Shipping Weight	12 lbs.
Accessories Included	Remote control, batteries (AA), power cord, Computer cable, User manual, lens cap
Safety	UL, CUL
Optional Accessories	Lamp 456-8406 Ceiling mount, universal, RPA-U or PRG-UNV

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

THE ALL NEW DUKANE
Education. Presentation. Inspiration.

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 866.280.4298
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av

Spec: Subject to change

ImagePro is a registered trademark of Dukane Corporation

5YR