
Duraplus 3320



Brief Introduction Beta 2.5	The Duraplus 3320 standard portable LCD projector has 2200 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. A picture width of up to 408 cm is possible. However, the image should be smaller in room light. We recommend max. 272 cm. This model is no longer offered by Duraplus.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector		Screen
Ansi-Lumen	2200		733 Lux (bei 200 cm Screen)
Contrast	400:1 full on/off		400:1 full on/off
Black Level	5,5000 min. Lumen		1,846 min. Lumen
Offset	-		

Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W SHP Lamp
Light Life	-
Operating Costs	-
Focus	Powered
Zoom	Powered 1,39
Objective	F=2,5-3,0 f=47,3-65,66 mm
Throw Ratio	1,79-2,50:1
Audio	2 x 2W
Connections	DVI D-sub 15pin in und out Cinch Video in S-Video in Mini Jack
Ceiling Mounting	Yes
Power	280W
Size WxHxD	305 x 150 x 395 mm (12"x5,9"x15,6") 18,07 L/dm³
Operating Noise	-
Weight	6,70 kg / 14,77 lbs.

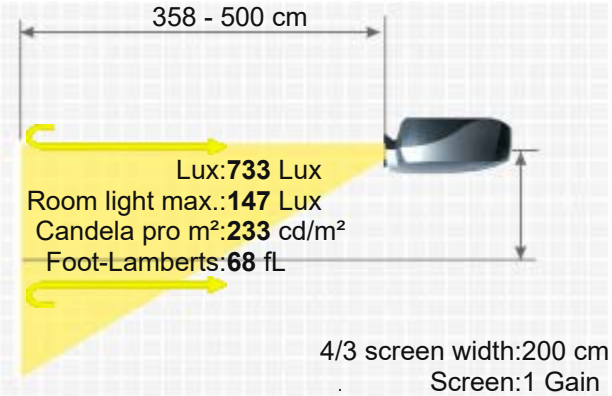



DURAPLUS 3320

Keystone	Vert.: +/-15°
Illumination	-
Frequenz	H-sync: 15-93 kHz V-sync: 43-85 Hz
Foot-Lamberts	68 fL / max. 408 cm screen width 233 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details

https://www.projector-database.com/pro/duraplus3320-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.