Duraplus 3340



Brief Introduction Beta 2.5	The 3340 LCD projector from Duraplus has 2800 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 461 cm with its 2800 Ansi lumens. In room light, however, the image width should ideally be less than 307 cm. The model is no longer offered by Duraplus.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2800	933 Lux (bei 200 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level	7,0000 min. Lumen	2,35 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W SHP Lamp
Light Life	-
Operating Costs	-
Focus	Powered
Zoom	Powered 1,28
Objective	F=1,7-2,1 f=52,3-67 mm
Throw Ratio	2,0-2,5:1
Audio	2 x 2W
Connections	DVI D-sub 15pin in und out Cinch Video in S-Video in Mini Jack
Ceiling Mounting	Yes
Power	280W
Size WxHxD	305 x 150 x 395 mm (12"x5,9"x15,6") 18,07 L/dm³
Operating Noise	-
Weight	6,70 kg / 14,77 lbs.





DURAPLUS 3340

Keystone	Vert.: +/-15°
Illumination	-
Frequenz	H-sync: 15-93 kHz V-sync: 43-85 Hz
Foot-Lamberts	87 fL / max. 461 cm screen width 298 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04



Data

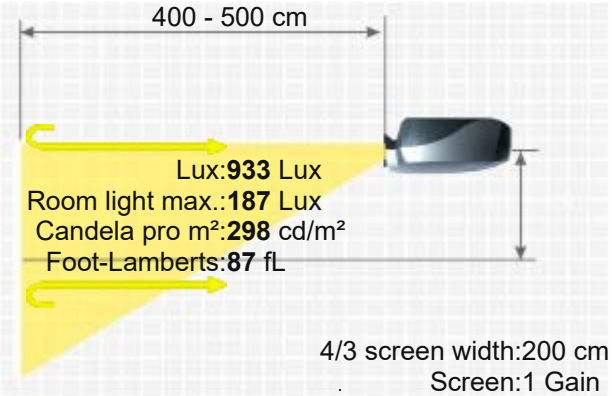

More Details

https://www.projector-database.com/pro/duraplus3340-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.