
Eiki LC X71/L



EIKI LC X71/L


Brief Introduction Beta 2.5	The Eiki model LC X71/L is an LCD projector with XGA 1024 x 768 resolution and a contrast of 1000:1. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 5500 Ansi lumens, an image width of 646 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 431 cm). Playing 1080P is also no problem for the projector. It was launched in 2006 and is no longer offered by the manufacturer Eiki, but is still one of the most popular projectors.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 5500 / Screen: 1833 Lux (200 cm Screen width)
Contrast	Projector: 1000:1 full on/off / Screen: 1000:1 full on/off
Black Level	Projector: 5,5000 min. Lumen / Screen: 1,839 min. Lumen
Lens shift	Vert.: +50% -0% motorisch
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	318W P-VIP Lamp Article Nr.: 610 328 7362
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,3
Objective	F=1,7-2,0 f=48,2-62,6 mm / L optional
Throw Ratio	1,7-2,3:1
Audio	-
Connections	1 x DVI-D (HDCP kompatibel) 1 x D-Sub 15-pin in und out 1 x Mini Jack in und out 5 x BNC RGBHV 1 x S-Video 3 x YUV 2 x Cinch Stereo in

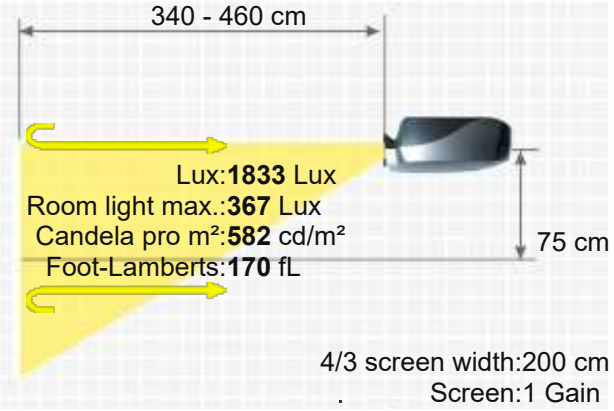

1 x USB Typ B
1 x Mini DIN8-pin
1 x 3,5 mm Mini Jack (Fernbedienung)
2 x Klemmanschluss (stereo Front, ext. Lautsprecher Ausgang)



Ceiling Mounting	Yes, is possible.
Power	480 / 370W in Eco Mode
Size WxHxD	319 x 170,8 x 470,2 mm (12,6"x6,7"x18,5") 25,49 L/dm³
Operating Noise	39 / 35 dB in Eco Mode

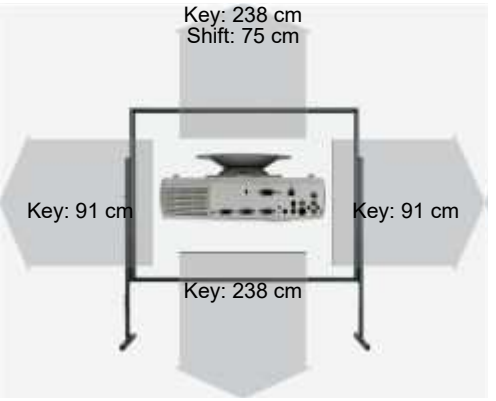

Weight	9,00 kg / 19,84 lbs.
Keystone	Vert.: +/-35° Hori.: +/-15°
Illumination	90%
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 180 MHz
Foot-Lamberts	170 fL / max. 646 cm screen width 582 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion motorisch ■ Freeze ■ User logo ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ 24/7 continuous operation capable ■ Remote control with laser pointer und mouse control ■ Digital Zoom ■ 3D noise reduction. ■ Temperature-controlled fans. ■ The AUTO-BRIGHTNESS-Adjustment-System guarantees optimal adjustment of light output with optimal contrast values. ■ Auto Mode Function ■ The Auto Mode Function regulates light output depending on the brightness values of the incoming video signal.
Screen Mirroring	-

Optional accessories

	Nackte Osram Lampe	NLMP4852	94,31 €
	Lampe Ruby	Ruby-LMP4852	120,17 €
	Lampe Original	610-328-7362 / LMP101 / ET-SLMP101	EOL €
	Kompatible Lampe	LMP-K16385	67,31 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	945 060 2239	EOL €
	Luftfilter (klein) Original	POA-FIL-130-k / 910 303 8781	EOL €
	Luftfilter (gross) Original	POA-FIL-130-g / 910 303 8774	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
0001-4279	5.73-8.59:1	1146-1718 m	41%		Manual
0001-4278	4.96-8.3:1	992-1660 m	50%		Manual
AH-24241 (T32)	4.24-5.87:1	848-1174 m	41%		Powered
0001-4277	2.62-4.77:1	524-954 m	50%		Manual
AH-23132 (T31A)	2.39-4.19:1	478-838 m	41%		Powered
AH-23122 (W31A)	1.29-1.81:1	258-362 m	41%		Powered
0001-4296	0.79:1	158 m	0.0% Fix		No Zoom
0001-4275	0.95:1	190 m	0.0% Fix		No Zoom
0001-4276	1.15:1	230 m	0.0% Fix		No Zoom
AH-32011 (W32)	0.84:1	168 m	0.0% Fix		No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2026-06-09

Data






More Details

HCinema

https://www.projector-database.com/pro/eikilcx71-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.