eLux LX600



3LCD USB

Brief Introduction Beta 2.5	A brief introduction to the LX600: The eLux LCD projector offers 4500 Ansi-Lumen, a contrast of 500:1 and an XGA 1024 x 768 resolution. An image width of up to 584 cm is possible, if the image width is smaller (we recommend max. 389 cm), rooms with residual light are also no problem. It came onto the market in 2008 and is no longer offered by the manufacturer eLux.
Display Type	3 x 0,79" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	4500
Projector: Contrast	500:1 full on/off
Projector: Black Level Offset	9,0000 min. Lumen
Screen	1500 Lux (bei 200 cm Screen)
Screen	500:1 full on/off
Screen	3,018 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	275W NSH Lamp Articel Nr.: LMP-111
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,7-1,9 f=24,0-28,8 mm
Throw Ratio	1,47-1,78:1
Audio	1 x 8W Mono
Connections	DVI-I in D-sub 15 pin in und out 5 x BNC RGBHV in YUV in S-Video in Cinch Video in Mini Jack Audio in und out RS232C Din 9 pin in USB Typ B
Ceiling Mounting	Yes
Power	-
Size WxHxD	480 x 152 x 360 mm (18,9"x6"x14,2") 26,27 L/dm³
Operating Noise	33 / 30 dB in Eco Mode
Weight	7,50 kg / 16,53 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	85%

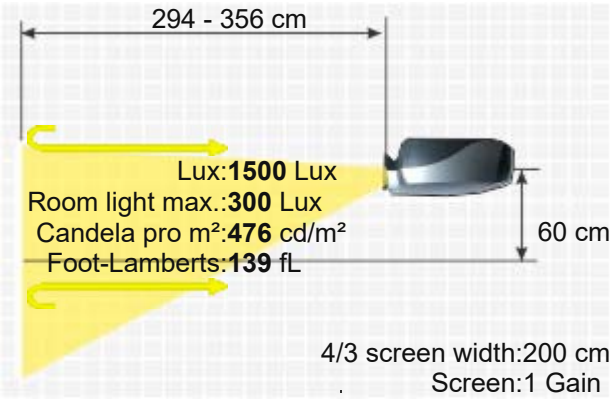



ELUX LX600

Frequenz	H-sync: 15-107 kHz V-sync: 10-120 Hz Range max.: 170 MHz
Foot-Lamberts	139 fL / max. 584 cm screen width 476 cd/m²
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Optional LAN network compatible.
Status	2008 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/eluxlx600-en.html

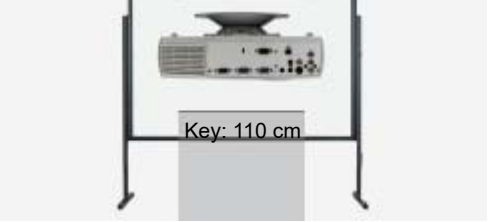

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.