eLux SX33






Brief Introduction Beta 2.5	A brief introduction to the eLux SX33. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. The horizontal and vertical keystone correction provides leeway when setting up. An image width of up to 408 cm is possible as the projector has 2200 Ansi lumens. However, if room light is available, the image should be a maximum of 272 cm wide. The projector is very quiet compared to others with an operating noise of 27 decibels. It is no longer offered by the manufacturer eLux.
Display Type	3 x 0,7" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array

	Projector	Screen
Ansi-Lumen	2200	733 Lux (bei 200 cm Screen)
Contrast	500:1 full on/off	500:1 full on/off
Black Level	4,4000 min. Lumen	1,475 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	150W Lamp
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	manuell
Zoom	Manual 1,2
Objective	-
Throw Ratio	-
Audio	1 x 2W Mono
Connections	DVI-I D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in Mini Jack USB RS232C

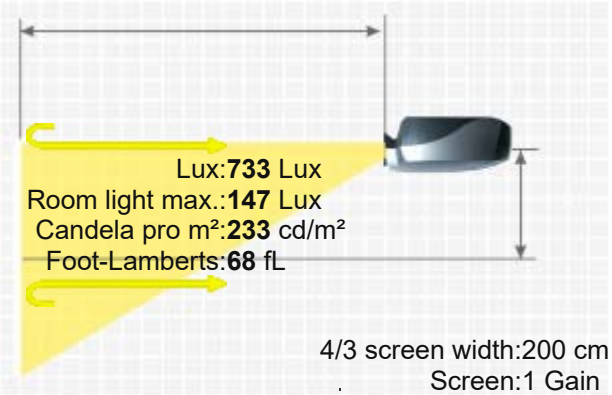



Ceiling Mounting	Yes
Power	220W
Size WxHxD	277 x 104 x 294 mm (10,9"x4,1"x11,6") 8,47 L/dm³
Operating Noise	27dB
Weight	3,18 kg / 7,01 lbs.
Keystone	Vert.: +/-15° Hori.: +/-10°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz
Foot-Lamberts	68 fL / max. 408 cm screen width 233 cd/m²
Features	■ Freeze ■ Eco Mode ■ Picture-in-Picture ■
Please note	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

Data





More Details

https://www.projector-database.com/pro/eluxsx33-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.