

Enthronic E970X



3LCD

Brief Introduction Beta 2.5	The E970X LCD has 2500 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. The projector can illuminate an image width of up to 435 cm thanks to its 2500 Ansi lumens. In room lighting, however, the picture width should ideally be less than 290 cm. This model is no longer available from Enthronic.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector Ansi-Lumen	2500
Contrast	400:1 full on/off
Black Level	6,2500 min. Lumen
Offset	
Screen	833 Lux (bei 200 cm Screen) 400:1 full on/off 2,098 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	250W UHL Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	F=1,7-2,1 f=38-49 mm
Throw Ratio	2,1-2,68:1
Audio	-
Connections	D-sub 15pin in und out
Ceiling Mounting	Yes
Power	260W / 20W standby
Size WxHxD	305 x 87 x 240 mm (12"x3,4"x9,4") 6,37 L/dm³
Operating Noise	-
Weight	-
Keystone	Vert.: +/-15° Hori.: +/-10°
Illumination	90%
Frequenz	H-sync: 15,63-91 kHz V-sync: 50-58 Hz Range max.: 230 MHz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

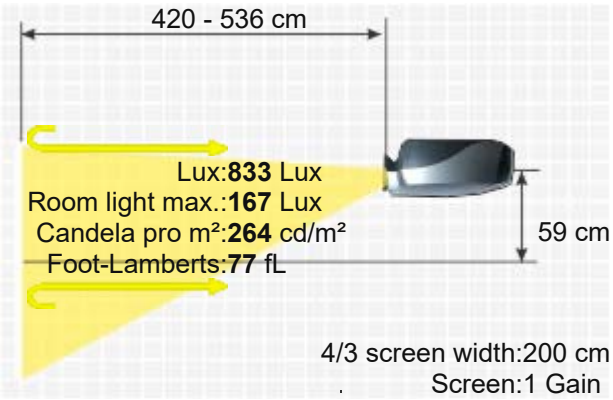

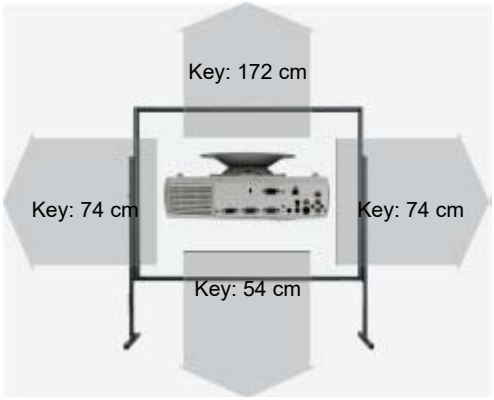

More Details

HCinema

https://www.projector-database.com/pro/enthronice970x-en.html

ENTHRONIC E970X

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.