Epson USA PowerLite 4300



3LCD | DICOM Simulation | Lens Shift | PJLink | W.-Optiken | sRGB

Brief Introduction Beta 2.5	A brief introduction to the Epson USA PowerLite 4300. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 1000:1. Includes a lens shift and keystone correction function, which provides freedom during installation. 5200 Ansi lumens ensure that a picture width of 628 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 419 cm. The projector can also play 1080P without any problems. On the market since 2010, the model is no longer offered by the manufacturer Epson USA.
Display Type	3 x 0,8" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Projector: Ansi-Lumen	5200
Projector: Contrast	1000:1 full on/off
Projector: Black Level	5,2000 min. Lumen
Screen	1733 Lux (bei 200 cm Screen) 1000:1 full on/off 1,738 min. Lumen
Lens shift	Vert.: +/-50% Hori.: +/-10%
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	330W UHE Lamp Articel Nr.: ELPLP63 / V13H010L63
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,81
Objective	F=1,65-2,55 f=21,28-37,94 mm
Throw Ratio	1,29-2,34:1
Audio	7W Mono
Connections	HDMI 5 x BNC RGBHV in S-Video in Cinch Video in Cinch Stereo in RS232C
Ceiling Mounting	Yes
Power	464 / 383W in Eco Mode
Size WxHxD	470 x 135 x 311,5 mm (18,5"x5,3"x12,3") 19,73 L/dm³
Operating Noise	38 / 31 dB in Eco Mode
Weight	6,80 kg / 14,99 lbs.
Keystone	Vert.: +/-40° Hori.: +/-20°
Illumination	-

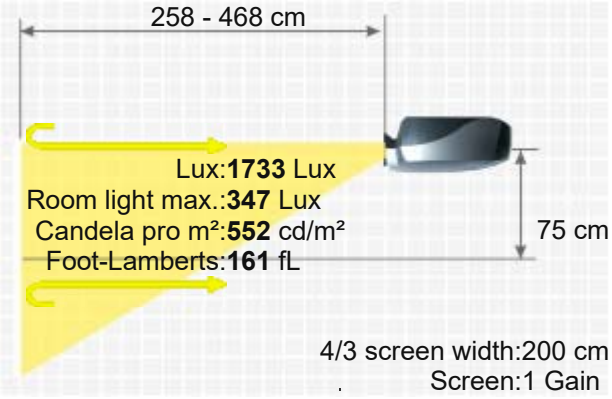

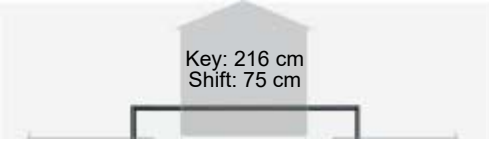

EPSON USA POWERLITE 4300

Frequenz	H-sync: 15-92 kHz V-sync: 50-85 Hz Range max.: 162 MHz
Foot-Lamberts	161 fL / max. 628 cm screen width 552 cd/m²



Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- PJLink™
- Lan network compatible.
- Overscan adjustable
- Digital Zoom
- DICOM Simulation

Optional

Philips bulb only	NLMP23864
Lamp ruby	Ruby-LMP23864
Lamp original	ELPLP63 / V13H010L63
Compatible lamp	LMP-K19940
Object lens original	ELPLM04 / V12H004M04
Object lens original	ELPLM05 / V12H004M05
Object lens original	ELPLR03 / V12H004R03
Object lens original	ELPLM06 / V12H004M06

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n21475

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLM06	5.35-7.2:1	10.7-14.4 m	+/-50%	+/-10%	Manual
ELPLM05	3.57-5.41:1	7.1-10.8 m	+/-50%	+/-10%	Manual
ELPLM04	2.37-3.6:1	4.7-7.2 m	+/-50%	+/-10%	
Fix Optional Lenses					
ELPLR03	0.78:1	1.6 m	+/-50%	+/-10%	No Zoom

Status Data: 2010 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: https://www.projector-database.com/pro/epsonpowerlite4300-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.