P series	
Model Number	P68
Optical System	
Display technology	0.79” TFT 3-LCD
Resolutions	Standard: XGA(1024 x 768) Maximum: UXGA(1600 x 1200) Screen ratio: 4:3 native; 16:10 compatibility
Brightness	5000 lumens
Contrast	600:1
Lamp	330W UHP
Fan Noise	40dB
Throw Distance	1.15~11.63m
Throw Ratio	1.47~1.77
Video Signal	
Video Compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M,N) / SECAM/PAL60
Computer Compatibility	PC, VGA, SVGA, XGA, SXGA, WXGA, UXGA
Input/Output	
Input Interfaces	RGB:Mini D-sub 15 pin x1, DVI-I x1; Video:RCA x1, S-Video x1, YPbPr x1; Audio:Mini Jack x2, RCA(L,R)x1
Output Interfaces	RGB:Mini D-sub 15 pin x1, Audio:Mini Jack x2
Remote Control (RJ45)	Optional
Speaker	Mono 8W x 1
General	
Dimensions (WxHxD)	480(W)x365(D)x155(H) mm
Net Weight	8.4KG
Power Supply	AC 100 to 240 V, 50/60 Hz
Power consumption	Max. 430W , Standby < 1W
Standard Accessories	
Standard Accessories	Remote control、AC Power Cord (1.5M)、VGA cable (1.5M)、 Owner's Manual CD Quick Start Guide

EVEREST DISPLAY INC.
4F, No.1, Li-Hsin Rd.6 Science Based Industrial Park,
Hsinchu, Taiwan 300
sales@everestdisplay.com.tw
TEL: +886-3-6667350
Fax: +886-3-5780432
www.everestdisplay.com.tw

Everest Display

Professional Projector for Large conference room
High brightness up to 5000lm output
Best choice among large-screen projectors
Projection equipment beyond imagination



Advanced 3 LCD panels design: High brightness and high resolution
Unique ventilation and thermal system: Dust-proof and smoke-proof
Multiple input/output interfaces: Fulfil different connection demands
Optional lens: Suitable for use in all conditions
Network connection function: Remote control in far distance
Fashionable appearance: Streamlined style
Easy maintenance: Side-mounted lamp and filters

3 Optional lens : Suitable for use in all conditions

Brightness absolutely no decay with any optional lens module.





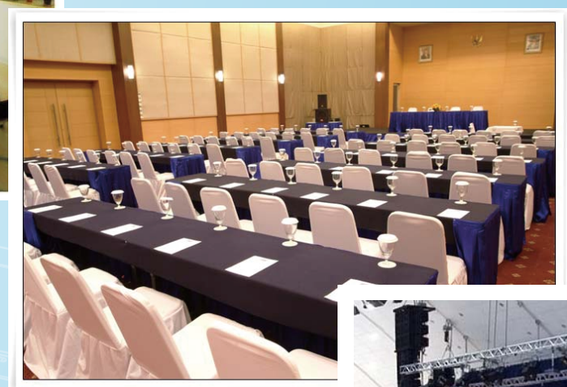



Lens Spec	ELS-01	ELS-02	ELS-03
Lens type			
F/#	1.7 ~ 1.99	1.77 ~ 2.2	1.8 ~ 2.1
Throw ratio	1.8 ~ 2.3	2.3 ~ 2.9	3.1 ~ 4.1
Zoom ratio	X 1.27	X 1.25	X 1.26
Screen	3.7M , 100"	4.66M , 100"	6.5M , 100"
Lens offset	90% (4.47 mm)	100% (6.01 mm)	120% (7.14 mm)

Lens Module Specifications

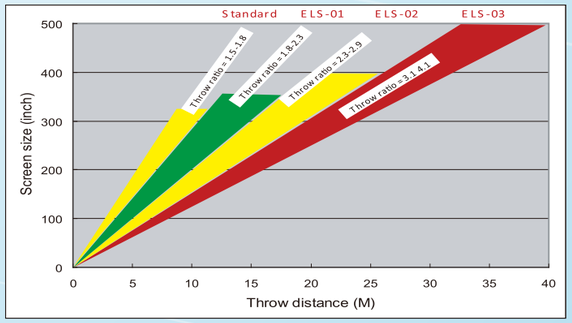

Lens throw distance and throw ratio cross-reference chart

Remote Control (LAN) for Convenient Use

Equipped with the RJ45 network port to turn on projector through computers connected in the same domain (LAN) and detect lamp and filter timer for you to capture more accurately the lamp and filter replacement timing.



Monitors up to 3 projectors at the same time.

Multiple input/output interfaces for quality audio and video performance

Multiple input Interfaces
Including analogue (RGB), digital (DVI), video, S-video, and YPbPr input interfaces and independent audio input to meet individual demands.

Professional DVI Input
The DVI-I interface allows users to directly connect a digital signal source to the projector. Along with the DVI-to-RGB adapter, this can become a second RGB input for users.

Quality Video input
The PW390 and 3D comb filter design presents perfect quality video signals to fulfil users requesting for premium quality.

Built-in 8W Speaker
High-efficiency audio output for high quality audio and video output

Green Power Management
Eco-friendly designed power supply unit that consumes less than 1W in standby mode.

Premium Color Performance
12-bit enhanced gamma correction design and dynamic contract adjustment makes colours brighter and sharper.



Multiple input interfaces



Vivid color performance

Unique cooling and filer design for greater system stability

Dirt-proof Design
The one-in and one-out flow field design reduces contaminants from entering and damaging the projector. Sealed design at connection points to minimize chances of contamination.

Antistatic, Dustproof and Smoke-proof Filter
Enhances the absorption ability of fine dust and soot particles absorption in different environments to ensure projector durability and stability.

Multiple Folds Filter Design
Increases the surface area of air filter to effectively extend filter life.

Multiple-dirt-proof Filter Design
Ensures only clean air to enter the projector even in severe environments to prevent luminance reduction or flow field clogging.

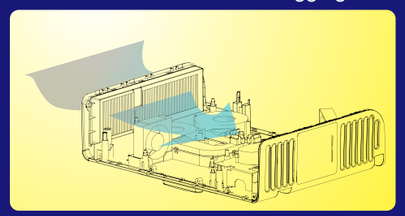

More Thoughtful Designs for Easy Operations and Maintenance

Automatic ceiling screen setup
Side filter cartridge replacement
side lamp cartridge replacement
Concealed handle
Electronic lock
U-shape anti-theft lock





