Hite Pro 265S



Brief Introduction Beta 2.5	A brief introduction to the Hite Pro 265S. The DLP projector has an SVGA 800 x 600 resolution and a contrast of 450:1. The projector will be able to illuminate a picture width of 312 cm well. However, if room light is available, the image width should ideally not exceed 208 cm. This model is no longer offered by Hite.	
Display Type	1 x DLP Chip SVGA 4/3 Ti Digital Light Processing Chip	
Ansi-Lumen	Projector: 1280	Screen: 427 Lux (bei 200 cm Screen)
Contrast	450:1 full on/off	450:1 full on/off
Black Level	2,8444 min. Lumen	0,955 min. Lumen
Offset	-	
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed	
Video Modes	PAL, SECAM, NTSC	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source	150W Lamp Articel Nr.: LMPf8055	
Light Life	2000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,32	
Objective	F=2,0-2,3 f=38-50 mm	
Throw Ratio	-	
Audio	1 x 1W	
Connections	D-sub 15pin in Cinch Video in S-Video in Mini Jack USB	
Ceiling Mounting	Yes	
Power	250W	
Size WxHxD	198 x 62 x 243 mm (7,8"x2,4"x9,6") 2,98 L/dm³	
Operating Noise	36dB	
Weight	2,30 kg / 5,07 lbs.	
Keystone	Vert.: +/-16°	
Illumination	85%	
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz	
Foot-Lamberts	40 fL / max. 312 cm screen width 137 cd/m²	
Features	-	
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04	
Data		

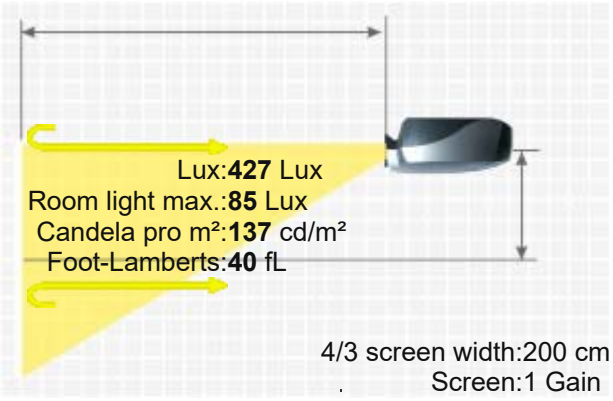

HITE PRO 265S

More Details

HCinema

https://www.projector-database.com/pro/hitepro265s-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.