

Hite Pro 280S



Brief Introduction Beta 2.5	With the Pro 280S, manufacturer Hite offers a standard portable LCD projector with SVGA 800 x 600 resolution and a contrast of 350:1. The projector will be able to illuminate a picture width of 348 cm well. However, if room light is available, the picture width should ideally not exceed 232 cm. It is no longer offered by the manufacturer Hite.
Display Type	2 x 0,9" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1600
Projector: Contrast	350:1 full on/off
Projector: Black Level	4,5714 min. Lumen
Projector: Offset	-
Screen	533 Lux (bei 200 cm Screen) 350:1 full on/off 1,536 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	-
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	F=2,0-2,3 f=38-50 mm
Throw Ratio	2,08-2,73:1
Audio	3W
Connections	D-sub 15pin in und out Cinch Video in S-Video in Mini Jack
Ceiling Mounting	Yes
Power	-
Size WxHxD	224 x 109 x 359 mm (8,8"x4,3"x14,1") 8,77 L/dm³
Operating Noise	-
Weight	4,00 kg / 8,82 lbs.
Keystone	Vert.: +/-16°
Illumination	-
Frequenz	-
Foot-Lamberts	50 fL / max. 348 cm screen width 171 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

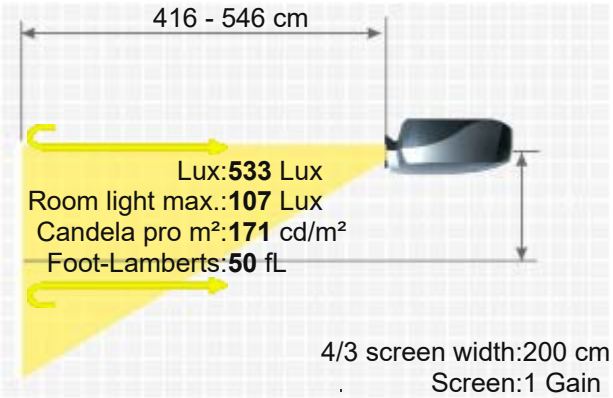

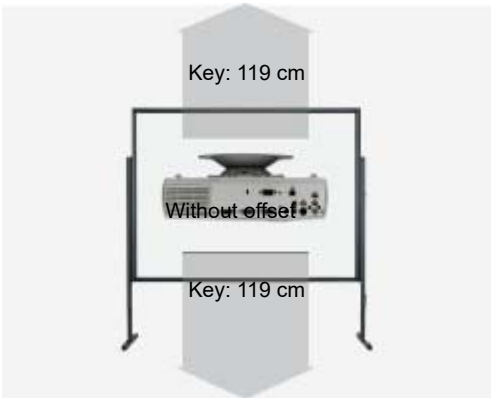

HITE PRO 280S

More Details

HCinema

https://www.projector-database.com/pro/hitepro280s-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.