
Hite Pro 200



Brief Introduction Beta 2.5	The Hite Pro 200 LCD projector has 650 Ansi lumens, a contrast of 100:1 and an SVGA 800 x 600 resolution. A picture width of up to 222 cm is possible as the projector has 650 Ansi lumens. However, if room light is available, the picture should be max. 148 cm wide. The projector is no longer sold by the manufacturer.
Display Type	1 x 6,5" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 650 / Screen: 217 Lux (bei 200 cm Screen)
Contrast	Projector: 100:1 full on/off / Screen: 100:1 full on/off
Black Level	Projector: 6,5000 min. Lumen / Screen: 2,235 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	-
Light Life	-
Operating Costs	-
Focus	-
Zoom	-
Objective	-
Throw Ratio	-
Audio	-
Connections	D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in
Ceiling Mounting	-
Power	400W
Size WxHxD	-
Operating Noise	-
Weight	4,70 kg / 10,36 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	20 fL / max. 222 cm screen width 69 cd/m²
Features	-
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

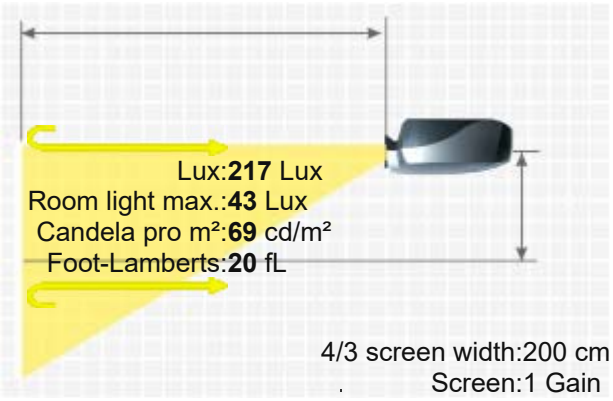

HITE PRO 200

More Details

HCinema

https://www.projector-database.com/pro/hitpro200-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.