
JAVES TLS 718




Brief Introduction Beta 2.5	A brief introduction to the TLS 718: The JAVES standard portable LCD projector offers 1800 Ansi lumens, a contrast of 300:1 and an SVGA 800 x 600 resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. 1800 Ansi lumens ensure that a picture width of 369 cm is also possible. However, if room light is available, the picture should be a maximum of 246 cm wide. The projector is very quiet compared to others with an operating noise of 30 decibels. This model is no longer offered by JAVES.
Display Type	3 x 0,7" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1800
Projector: Contrast	300:1 full on/off
Projector: Black Level	6,0000 min. Lumen
Projector: Offset	-
Screen	600 Lux (bei 200 cm Screen)
Screen	300:1 full on/off
Screen	2,02 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,16
Objective	F=2,0-2,3 f=21,8-25,2 mm
Throw Ratio	1,53-1,77:1
Audio	-
Connections	D-sub 15 pin in YUV in S-Video in Cinch Video in RS232C
Ceiling Mounting	-
Power	-
Size WxHxD	255 x 106 x 329 mm (10"x4,2"x13") 8,89 L/dm³
Operating Noise	30dB

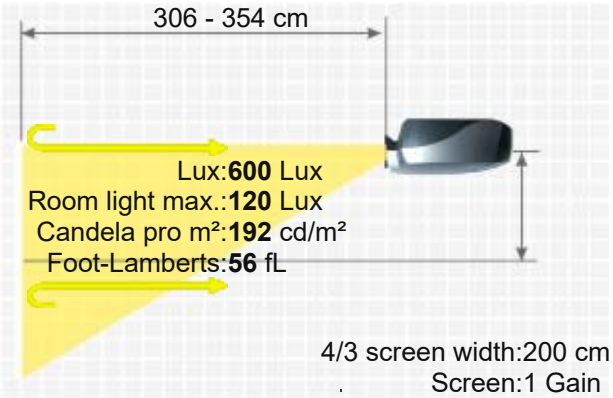

Key: 82 cm

JAVES TLS 718

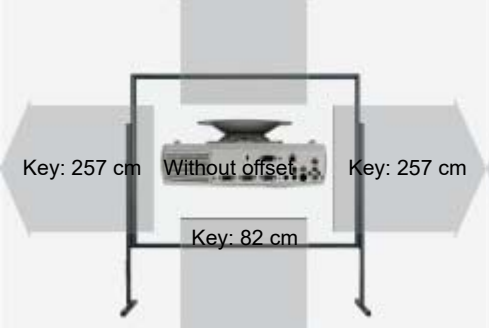

Weight	3,00 kg / 6,61 lbs.
Keystone	Vert.: +/-15° Hori.: +/-40°
Illumination	90%
Frequenz	H-sync: 15-69 kHz V-sync: 50-85 Hz
Foot-Lamberts	56 fL / max. 369 cm screen width 192 cd/m²
Features	■ Picture-in-Picture ■ Digital zoom
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema

https://www.projector-database.com/pro/javestls718-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.