

Kindermann KXD 160

KINDERMANN KXD 160



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2000 / 1600 im Eco Mode 667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off 2000:1 full on/off

Black Level

1,0000 min. Lumen 0,334 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W VIP Lamp

Articel Nr.: 8970

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=18-21,57 mm

Throw Ratio

1,6-1,9:1

Audio

1 x 2W

D-sub 15pin in

S-Video in

Cinch Video in

Mini Jack in


USB

Connections



Ceiling Mounting

Yes

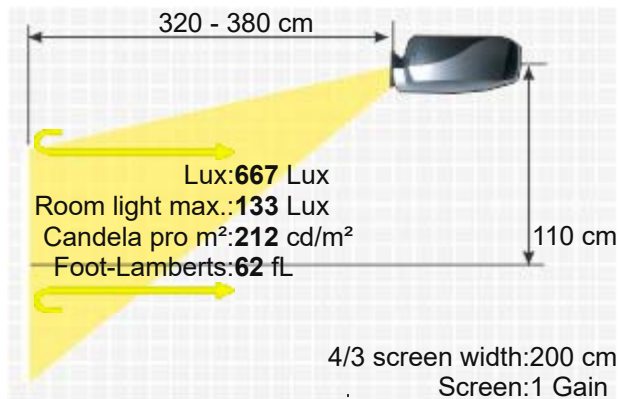

Power -
Size WxHxD 265 x 97 x 202 mm (10,4"x3,8"x8") 5,19 L/dm³
Operating Noise 34 / 32 dB in Eco Mode

Weight 2,20 kg / 4,41 lbs.
Keystone Vert.: +/-15°
Illumination 80%

Frequenz H-sync: 31-79 kHz
V-sync: 50-85 Hz

Foot-Lamberts 62 fL / max. 389 cm screen width
212 cd/m²

Features ■ Eco Mode
In Test ■ 4-segment colour wheel
-

Bulb only NLMP16121
Lamp ruby Ruby-LMP16121
Optional Lamp original 8971
Compatible lamp LMP-K16121

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16121>
2005 Discontinued (EOL) // Last update of the data: 2023-08-23



HCinema
<https://www.projector-database.com/pro/kindermannkxd160-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

