

Kindermann KXD 165

KINDERMANN KXD 165



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2600 / 2100 im Eco Mode

867 Lux (bei 200 cm Screen)

Contrast

2000:1

2000:1

Black Level

1,3000 min. Lumen

0,434 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

230W Lamp

Articel Nr.: 8954

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=18-21,57 mm

Throw Ratio

1,6-1,9:1

Audio

1 x 2W

D-sub 15 pin in und out

S-Video in


Cinch Video in

Mini Jack in

RS232C

USB in

Connections

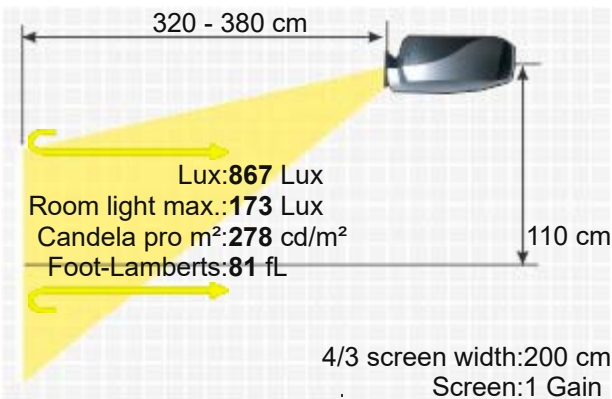

Ceiling Mounting Yes
Power -
Size WxHxD 265 x 97 x 202 mm (10,4"x3,8"x8") 5,19 L/dm³
Operating Noise 32 / 30 dB in Eco Mode

Weight 2,20 kg / 4,85 lbs.
Keystone Vert.: +/-15°
Illumination 80%

Frequenz H-sync: 31-79 kHz
 V-sync: 50-85 Hz

Foot-Lamberts 81 fL / max. 444 cm screen width
 278 cd/m²

Features ■ Eco Mode
 ■ 4 segments colour wheel.

In Test -

	Bulb only	NLMP16056
	Lamp ruby	Ruby-LMP16056
	Lamp original	8954
Optional	Compatible lamp	LMP-K16056
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16056>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema
<https://www.projector-database.com/pro/kindermannkxd165-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.