

# Kindermann KX 1280VVC



## Brief Introduction

Beta 2.5

### Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

The Kindermann model KX 1280VVC is an LCD projector with SXGA 1280 x 1024 resolution and a contrast of 100:1. An image width of up to 169 cm is possible, as the projector has 400 Ansi lumens. However, if room light is available, the picture should be max. 113 cm wide. This model is no longer offered by Kindermann.



1 x 13" LCD TFT Panel

SXGA 5/4 Liquid Crystal Display

Projector

400

100:1 full on/off

4,0000 min. Lumen

Screen

121 Lux (bei 203 cm Screen)

100:1 full on/off

1.25 min. Lumen

SXGA 1280 x 1024

1.310.720 Pixel

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

575W Metaldampf Lamp

1000 h.

-

-

-

f=30-33 mm

-

-

Cinch Video in

Cinch Stereo in

D-sub 15pin in 1 xAus.

S Video Eingang

Yes

750W

-

-

18,50 kg / 40,79 lbs.

-

-

-


11 fL / max. 169 cm screen width

38 cd/m<sup>2</sup>

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

-

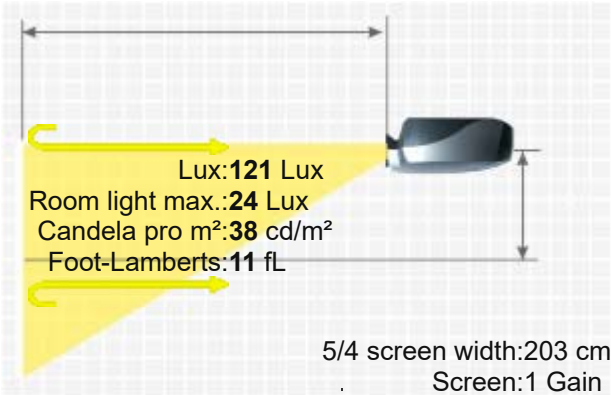

KINDERMANN KX 1280VVC



# HCinema

<https://www.projector-database.com/pro/kindermannsx1280vvc-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.