

Kindermann KX 400C

KINDERMANN KX 400C



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

Size WxHxD

Operating Noise

The short-throw KX 400C LCD projector from Kindermann has 2600 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. Thanks to the short-throw projection ratio of just 0.6:1, the projector does not get stuck in the room. For a 2m wide image, the projector only needs to be 120 cm away from the screen. This model is no longer offered by Kindermann.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

2600
800:1 full on/off
3,2500 min. Lumen

Screen

867 Lux (bei 200 cm Screen)
800:1 full on/off
1,088 min. Lumen

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Short Distance | Medium screen width or rooms with little light, max. 100 lumens.
230W Lamp
Articel Nr.: 3000000452

h.

Manual

No Zoom

F=1,8 f=9,02mm

0,6:1

1 x 7W


D-sub 15 pin in
S-Video in
Cinch Video in
RS232C Din 9 pin in
Mini Jack Audio in
RJ45 in

-

-

345 x 94 x 306 mm (13,6"x3,7"x12") 9,92 L/dm³

29 dB in Eco Mode

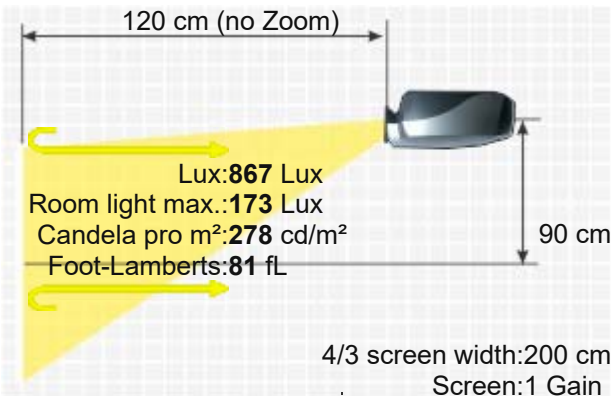

Key: 159 cm

Weight 3,80 kg / 8,38 lbs.
Keystone Vert.: +/-30°
Illumination -

Frequenz H-sync: 15-100 kHz
V-sync: 50-100 Hz

Foot-Lamberts 81 fL / max. 444 cm screen width
278 cd/m²

- Features
- Freeze
 - Blank (Black screen button)
 - Blackboard Modus
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Password protection
 - Remote control with laser pointer
 - Lan network compatible.
 - Short-throw projector

Status 2011 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/kondermannkx400c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.