

Lightware L-1020

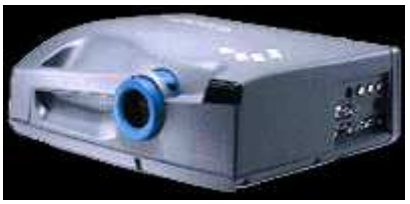

LIGHTWARE L-1020

Brief Introduction Beta 2.5	The Lightware L-1020 standard portable LCD projector has 609 Ansi lumens, a contrast of 150:1 and an XGA 1024 x 768 resolution. As Lightware specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. An image width of up to 215 cm is possible, as the projector has 609 Ansi lumens. However, if room light is available, the picture should be max. 143 cm wide. This model is no longer available from Lightware.
Display Type	3 x LCD LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 609 700 Lumen / Screen: 203 Lux (200 cm Screen width)
Contrast	Projector: 150:1 full on/off / Screen: 150:1 full on/off
Black Level	Projector: 4,0600 min. Lumen / Screen: 1,38 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	NTSC, PAL, SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W UHP Lamp Article Nr.: LMPf2801
Light Life	2000 h.
Operating Costs	67,5% / 0,27 €
Focus	Manual
Zoom	Manual
Objective	-
Throw Ratio	-
Audio	2 x 3W
Connections	S-Video: (1) Mini DIN 4-pin Cinch Video D-sub 15pin in
Ceiling Mounting	-
Power	200W
Size WxHxD	-
Operating Noise	-
Weight	6,20 kg / 13,67 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	19 fL / max. 215 cm screen width 65 cd/m²
Features	■ Remote control with mouse control ■ Remote control with backlight
Screen Mirroring	-

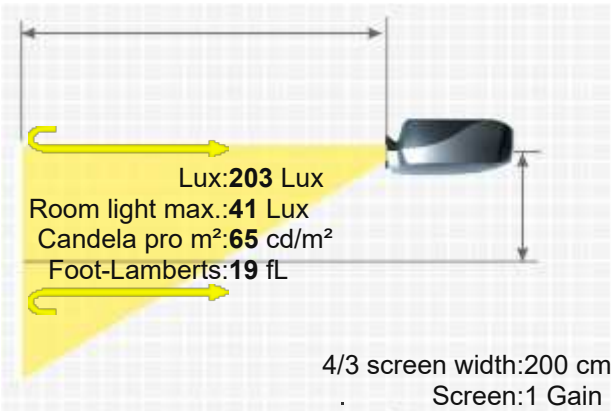

Optional accessories

	Lampe Original	LMPf2801	532,31 €
	Luftfilter universal	uni3mm	18,15 €

Status Data - Discontinued (EOL) // Last update of the data: 2026-06-09

More Details

https://www.projector-database.com/pro/lightwarel1020-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.