Lightware MVP800



Brief Introduction Beta 2.5	The stationaryLightware MVP800 LCD projector has 261 Ansi lumens, a contrast of 150:1 and an SVGA 800 x 600 resolution. As Lightware specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. An image width of up to 141 cm is possible, as the projector has 261 Ansi lumens. However, if room light is available, the picture should be max. 94 cm wide. The model is no longer offered by Lightware. It should also be noted that there are unfortunately no more replacement lamps for the projector, neither originals nor replicas.
Display Type	1 x 6,4" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 261 300 Lumen / Screen: 84 Lux (bei 203 cm Screen)
Contrast	Projector: 150:1 full on/off / Screen: 150:1 full on/off
Black Level	Projector: 1,7400 min. Lumen / Screen: 0.572 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel
Video Modes	NTSC, PAL, SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Very narrow picture width and rooms with very little light.
Light Source	400W Halogen Lamp Articel Nr.: LA800
Light Life	70 h.
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	-
Audio	2 x 3W
Connections	2 x Cinch Stereo in 1 x out 1 x Cinch Video in S-Video in D-sub 15pin in
Ceiling Mounting	Nein
Power	460W
Size WxHxD	-
Operating Noise	-

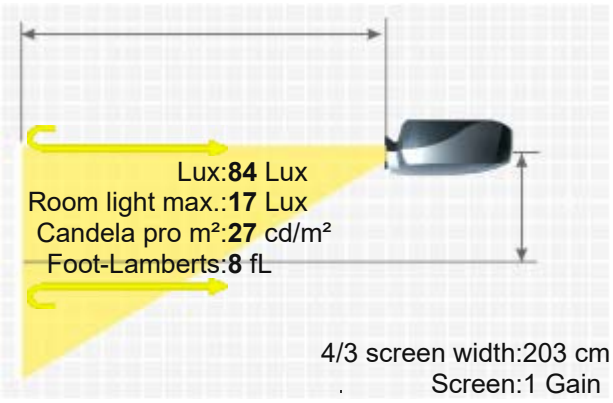



LIGHTWARE MVP800

Weight	-
Keystone	-
Illumination	-
Frequenz	H-sync: 15,0-50,0 kHz V-sync: 50-85 Hz
Foot-Lamberts	8 fL / max. 141 cm screen width 27 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2024-06-04
Data	
More Details	https://www.projector-database.com/pro/lightwarevp800-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.