LUXEONUSA
FRONT PROJECTOR

System Remote Control



D630 Series

Brighter, More Vivid, and Networked.



DLP™ Digital Multimedia Projector

When connected to a Local Area Network (LAN) by means of the RJ-45 connector, the projector can be controlled remotely through a Web browser by any of the clients (PCs connected to the LAN) on the LAN. The projector can also be accessed outside the LAN, provided a firewall is configured accordingly.

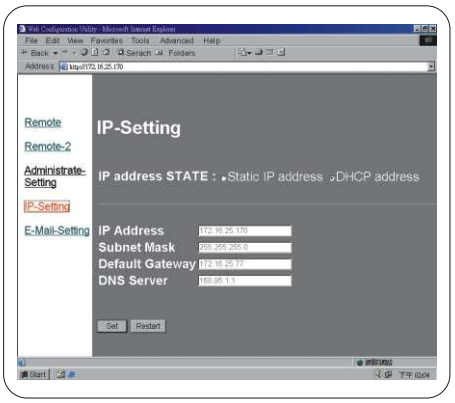

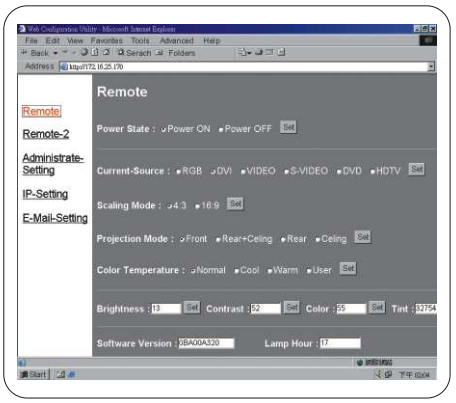

- > Crystal clear image quality driven by superb performance
- > Extra high brightness for middle and large rooms
- > Progressive scan delivers smoother video pictures
- > Digital keystone correction relieves distorted projection pictures
- > Eco-mode projection provides energy saving, more noise reduction and longer lamp life
- > Advanced remote networking technology for easy monitoring and operation
- > Advanced functions enables amazing presentations
- > Durable workhorse projector

PICTURE BY DLP™ A TEXAS INSTRUMENTS TECHNOLOGY

L.C.E.P

LUXEONUSA COLOR ESSENTIAL PROCESSING

LUXEONUSA picture-enhancing technology, which enhancesthe screen image via unique techniques and algorithms, for enhanced brightness, contrast, tint, color and clarity. This technology ensures every LUXEONUSA displays to contain a True Color enhancement, which reproduces stunning, lifelike colors close to those displayed by the Trinitron technology.

D630 Series

For Middle or Large







Input/Output Terminals

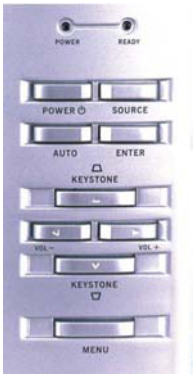

Key Pad

All Vivitek products are developed with certain aspects in mind, such as low-lead designs, certified electromagnetic emissions, zero radiation, low energy consumption and the lengthening of product life to prevent parts waste.

D630 MX Specification

Display Technology	TI DLP DMD, 0.7" x 1, 12°, DDR
Resolution	XGA 1024x768 Native, Support up to SXGA
Contrast Ratio	1500:1
Brightness	3000 ANSI Lumens
Uniformity	80%
Color	24 bit, 16.7million True Color
Lens	Zoom lens , manual zoom, manual focus
Projection Distance	1.5 - 10 meter
Projection Size(Diagonal)	35" - 284"
Throw Ratio	1.73 - 2.10
Aspec Ratio	4:3 & 16:9
Keystone Correction	+/- 15°
H & V Sync	15, 31 - 90KHz
	50 - 85Hz
DATA Compatibility	IBM PC or Compatible(VGA, SVGA, XGA, SXGA)
Video Compatibility	SDTV, EDTV, HDTV. NTSC/PAL.
Fan Noise	< 35 dB
Safety	UL/CUL, CB, CE, CCC, FCC Class B
Size (W x D x H)	11.22" x 8.66" x 3.38"(285mm x 220mm x 86mm)
Weight	6.8 lbs
Speaker	3w mono speaker
Security Lock	Kensington Lock
OSD Language	English, Chinese, French, Germany, Japanese, Italian,Korean,Swedish

E-mail Settings

The Projector can set to automatically e-mail status messages such as IP address, power state to a receiver's e-mail.

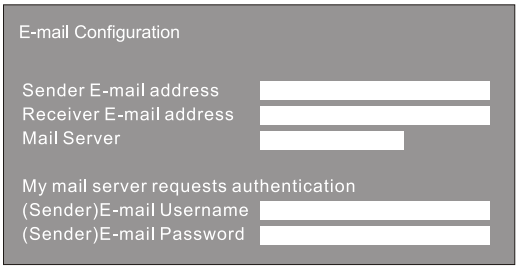

Projector Distance and Diagonal Screen Size

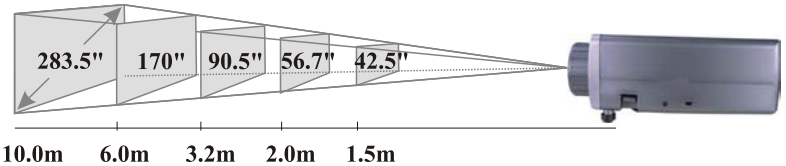

Wintory Co.,Ltd
6/330-1 Bangna-Trad Rd.,
Dokmai, Pravet, Bangkok 10250 Thailand
Tel (66)0-2316-9365(Auto) Fax (66)0-2316-9364
Website: http://www.wintory.com E-mail: info@wintory.com