Microtek MVP800X



Brief Introduction Beta 2.5	The Microtek model MVP800X is an LCD projector with XGA 1024 x 768 resolution and a contrast of 200:1. The projector will be able to illuminate a 222 cm image width well. However, if room light is available, the image width should ideally not exceed 148 cm. This model is no longer available from Microtek.		
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display		
Ansi-Lumen	Projector: 650	Screen: 210 Lux (bei 203 cm Screen)	
Contrast	Projector: 200:1 full on/off	Screen: 200:1 full on/off	
Black Level	Projector: 3,2500 min. Lumen	Screen: 1.066 min. Lumen	
Offset	-		
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed		
Video Modes	NTSC, PAL, SECAM		
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Small screen width, rooms with very little ambient light below 100 lumens.		
Light Source	120-W UHP Lamp		
Light Life	1000 h.		
Operating Costs	-		
Focus	Manual		
Zoom	Manual 1,3		
Objective	-		
Throw Ratio	-		
Audio	2 x 5W		
Connections	-		
Ceiling Mounting	-		
Power	215W		
Size WxHxD	-		
Operating Noise	-		
Weight	-		
Keystone	-		
Illumination	-		
Frequenz	-		
Foot-Lamberts	20 fL / max. 222 cm screen width 69 cd/m²		
Features	-		
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04		
Data			

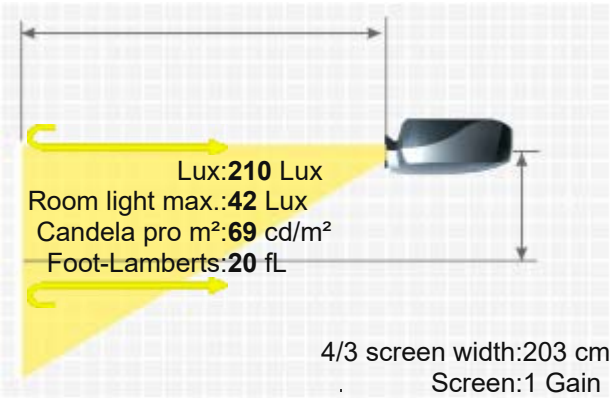

MICROTEK MVP800X

More Details

HCinema

https://www.projector-database.com/pro/microtekmvp800x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.