Mitsubishi S490U




MITSUBISHI S490U

Brief Introduction Beta 2.5	With the S490U, manufacturer Mitsubishi offers a standard portable LCD projector with SVGA 800 x 600 resolution and a contrast of 400:1. The built-in ambient light sensor detects the ambient light in the room and automatically optimizes the image. 444 cm image width, the projector will be able to illuminate well. However, if ambient light is available, the picture width should ideally not exceed 296 cm. On the market since 2001, the model is no longer offered by the manufacturer Mitsubishi.
Display Type	3 x 1,3" LCD TFT Panel SVGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2600	841 Lux (bei 203 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level	6,5000 min. Lumen	2.119 min. Lumen
Offset		

Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC/NTSC 4.43/Pal (inkl. PAL-M, N) SECAM/PAL-60/DVD/HDTV
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	300W SHP Lamp Articel Nr.: VLT-X500LP
Light Life	2000 h.
Operating Costs	28,57% / 0,12 €
Focus	Powered
Zoom	Powered 1,25
Objective	F=1,8-2,1 f=51-64 mm
Throw Ratio	1,9-2,4:1
Audio	2 x 3W Stereo
Connections	2 x D-Sub 15-polig in 1 x out 1 x DVI-D 2 x Stereo Mini-Stecker 1 x out 2 x RCA 2 x S-Video 2 x Stereo RCA 1 x RS232C (DIN 8-polig)

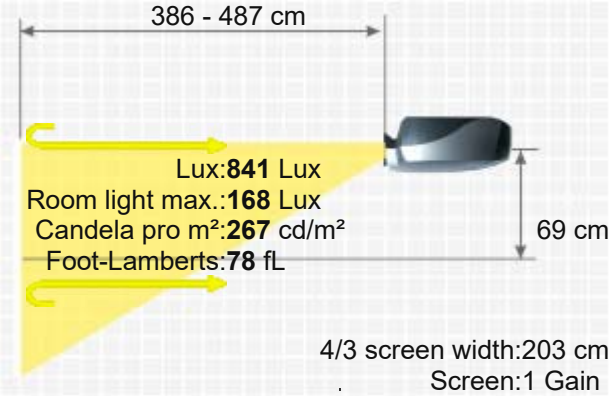

	1 x USB
Ceiling Mounting	Yes
Power	420W
Size WxHxD	305 x 148 x 385 mm (12"x5,8"x15,2") 17,38 L/dm³
Operating Noise	34dB
Weight	6,90 kg / 13,23 lbs.
Keystone	-
Illumination	85%
Frequenz	H-sync: 15-92 kHz V-sync: 50-85 Hz Range max.: 160 MHz
Foot-Lamberts	78 fL / max. 444 cm screen width 267 cd/m²
Features	■ Freeze ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Picture-in-Picture ■ Password protection ■ Remote control with laser pointer ■ Ambient Light Sensor. ■ ColorView ■ RIS® (Room Illumination Sensor) ■ Colour balance function ■ Gamma Correction ■ Digital Zoom ■ Smart Hub network technology

Optional

Bulb only	NLMP2388
Lamp ruby	Ruby-LMP2388
Lamp original	VLT-X500LP
Compatible lamp	LMP-K2345
Universal Remote original	Fernb-uni-V3

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n2345

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Mitsubishi Wide0.8X	1.52-1.93:1	3.1-3.9 m	45% Fix		Powered
Mitsubishi OL-X500TZ	3.46-5.18:1	7-10.5 m	45% Fix		Powered
Mitsubishi OL-X500SZ	1.34-1.63:1	2.7-3.3 m	45% Fix		Powered
Mitsubishi OL-X500LZ	2.37-3.29:1	4.8-6.7 m	45% Fix		Powered
Fix Optional Lenses					
Mitsubishi OL-X500FR	0.82:1	1.7 m	0.0% Fix		No Zoom

Status 2001 Discontinued (EOL) // Last update of the data: 2023-08-12

Data



More Details

https://www.projector-database.com/pro/mitsubishis490u-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.