


Mitsubishi XL5900U/LU

MITSUBISHI XL5900U/LU



A brief introduction to the Mitsubishi XL5900U/LU. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 600:1. The built-in lens shift and keystone correction function provides freedom when setting up. 3900 Ansi lumens ensure that a picture width of 544 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 363 cm. The projector was launched in 2003 and is no longer sold by the manufacturer.

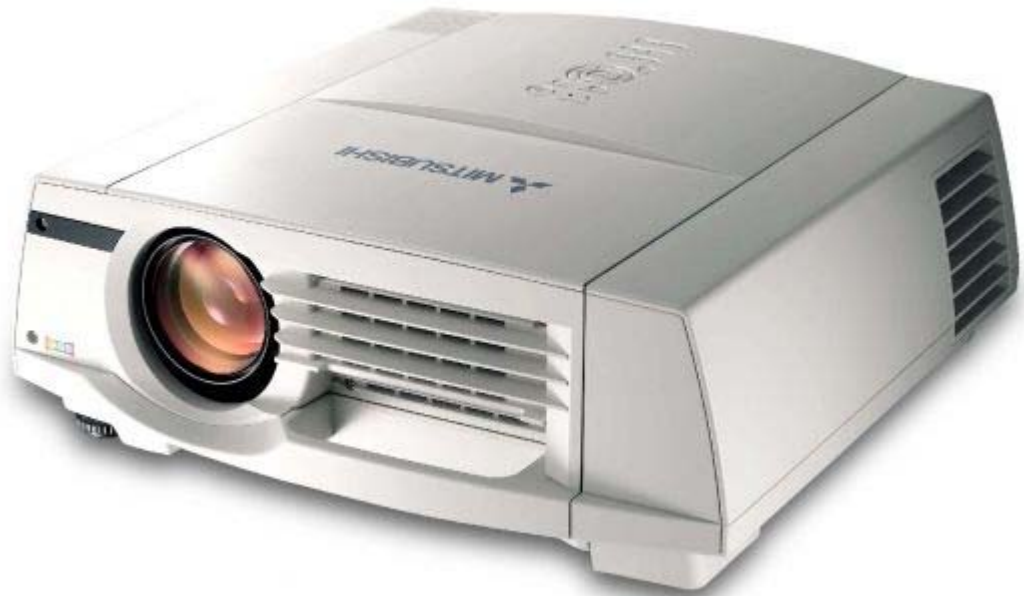

3 x 1,3" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

3900

600:1 full on/off

6,5000 min. Lumen

Vert.: +45% -0% Hori.: +/-5% motorisch

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC/NTSC 4.43/PAL (including PAL-M, N)/SECAM/PAL-60/DVD (component)HDTV input ready (525p, 720p, 1080i)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

270W SHP / 220W im Eco Mode Lamp

Articel Nr.: VLT-XL5950LP

2000 h.

Screen

1262 Lux (bei 203 cm Screen)

600:1 full on/off

2.114 min. Lumen

Operating Costs

-

Powered


Powered 1,25

F=1,8-2,1 f=51-64 mm / LU optional

1,8-2,1:1

5W Mono

D-sub 15pin in und out
5 x BNC RGBHV in
S-Video in
Chnich Video in
Cinch Stereo in
RS232C Din 8pin

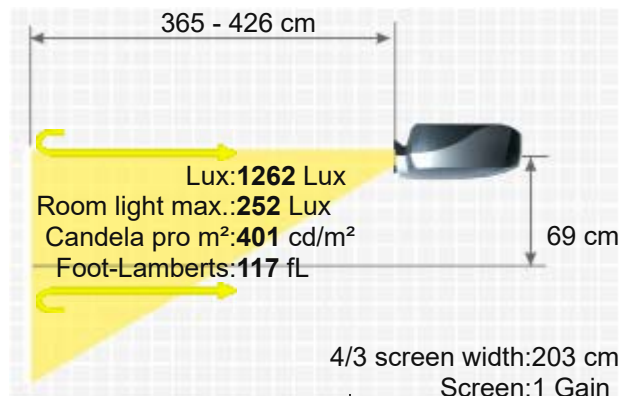

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom


Objective

Throw Ratio

Audio

Connections

USB in
Mini Jack in und out

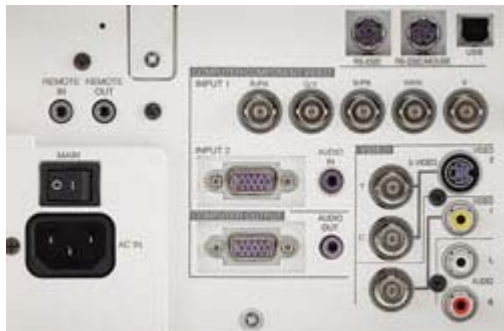

Ceiling Mounting Yes
Power 380W
Size WxHxD 371 x 176 x 443 mm (14,6"x6,9"x17,4") 28,93 L/dm³
Operating Noise 35 / 30 dB in Eco Mode

Weight 9,00 kg / 19,84 lbs.
Keystone Vert. +30°-20°
Illumination -


Frequenz H-sync: 15-100 kHz
V-sync: 50-120 Hz
Range max.: 170 MHz
Foot-Lamberts 117 fL / max. 544 cm screen width
401 cd/m²

Features

- Lens shift Funktion motorisch
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Picture-in-Picture
- Remote control with laser pointer
- anti-theft protection with alarm signal
- digital zoom (X1-10),
- ColorView

Bulb only	NLMP2416
Lamp ruby	Ruby-LMP2416
Lamp original	VLT-XL5950LP / 915D035O20
Compatible lamp	LMP-K17045
Universal Remote original	Fernb-uni-V3
Air filter original	620D119010
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n2416>

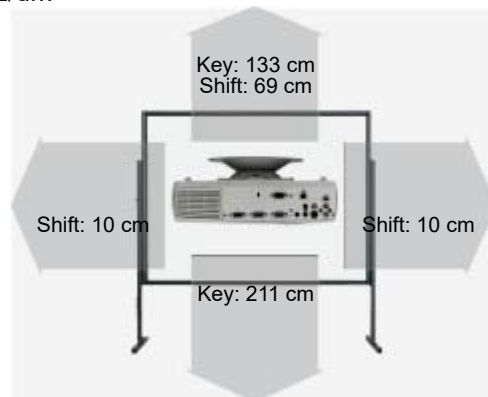

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Mitsubishi OL-X500SZ	1.34-1.63:1	2.7-3.3 m	45%	+/-5%	Powered
Mitsubishi OL-X500LZ	2.49-3.29:1	5.1-6.7 m	45%	+/-5%	Powered
Mitsubishi OL-X500TZ	3.46-5.18:1	7-10.5 m	45% Fix		Powered
Fix Optional Lenses					
Mitsubishi OL-X500FR	0.82:1	1.7 m	0.0% Fix		No Zoom

Status 2003 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/mitsubishixl5900-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.