

Nec PA803U

NEC PA803U



The PA803U LCD has 8000 Ansi-Lumen, a contrast of 10000:1 and a WUXGA 1920 x 1200 resolution. The built-in lens shift and keystone correction function provides freedom in projection adjustment. An image width of up to 909 cm is possible as the projector has 8000 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 606 cm is recommended. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. Playing 1080P and 4K (compressed) is also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection.



3 x 0,76" LCD TFT Panel mit MLA
WUXGA 16/9 Liquid Crystal Display with Micro Lense Array

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

8000

10000:1 full on/off

0,8000 min. Lumen

Vert.: +50% -10% Hori.: +/-30%

WUXGA 1920 x 1200

2.304.000 Pixel

HD4K 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

420 / 380W im Eco Mode Lamp

Article Nr.: NP42LP

3000 h. 5000 h. in Eco Mode

3,14% / 0,11 €

Powered

Powered

optional


optional

3556 Lux (bei 200 cm Screen)

10000:1 full on/off

0,356 min. Lumen

Projector
Screen

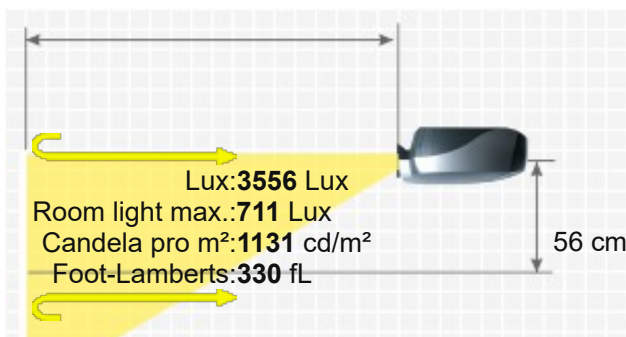

2 x HDMI HDCP 2.2 1.4 in
D-sub 15pin in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 in
HDBaseT in

Connections



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
542 /376W in Eco Mode
499 x 164 x 406 mm (19,6"x6,5"x16") 33,23 L/dm³
39 / 33 dB in Eco Mode

Weight
Keystone
Illumination

10,20 kg / 22,05 lbs.
Vert.: +/-40°
Hori.: +/-40°
-

Frequenz

-


Foot-Lamberts

330 fL / max. 909 cm screen width
1131 cd/m²

- Features
- Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion
 - Freeze
 - User logo
 - Eco Mode
 - High Dynamic Range (HDR)
 - Warping
 - 360° installable
 - Edge Blending
 - Picture-in-Picture
 - Password protection
 - PJLink™
 - Control via web browser
 - Lan network compatible.
 - Crestron®-Software compatible.

Screen Mirroring

-

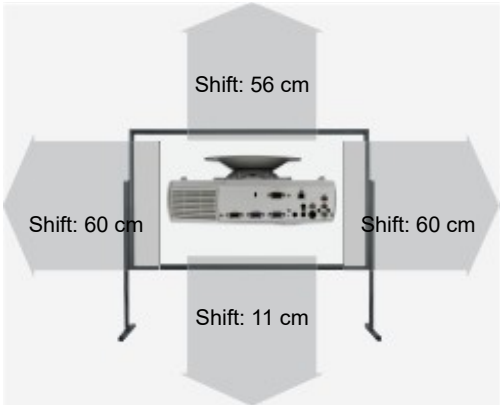

Optional accessories

	Lampe Ruby	Ruby-LMP24062	256,30 €
	Lampe Original	NP42LP / 100014502	342,84 €
	Kompatible Lampe	LMP-K24062	132,73 €
	Luftfilter Kompatibel	Alternative zu:100014501 / NP06FT	52,66 €
	Objektiv Original	NP12ZL / 60003220	1.859,05 €
	Objektiv Original	NP11FL / 60003222	EOL €
	Objektiv Original	NP13ZL / 60003217	489,19 €

	Objektiv Original	100015167 / NP44ML	6.186,14 €
	Kabelabdeckung Original	100014570 / NP10CV	EOL €
	Objektiv Original	100014645 / NP43ZL	2.175,70 €
	Objektiv Original	100014473 / NP41ZL	1.021,60 €
	Objektiv Original	100014472 / NP40ZL	1.921,47 €
	Objektiv Original	NP14ZL / 60003221	EOL €
	Objektiv Original	NP30ZL / 100013349	1.802,73 €
	Fernbedienung Original	7N901081 / RD-466E / 7N901321 / RD-480E	30,64 €
	Filter Original	100014501 / NP06FT	82,63 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP43ZL	2.99-5.93:1	6-11.9 m	50-10%	+/-20%	Powered
NP42ZL	2.99-5.98:1	6-12 m	50-10%	+/-30%	Powered
NP41ZL	1.3-3.02:1	2.6-6 m	50-10%	+/-30%	Manual
NP40ZL	0.79-1.1:1	1.6-2.2 m			Powered
NP30ZL	0.79-1.04:1	1.6-2.1 m			Manual
NP14ZL	2.9-4.68:1	5.8-9.4 m	50-10%	+/-30%	Manual
NP13ZL	1.46-2.95:1	2.9-5.9 m	50-10%	+/-30%	Manual
NP12ZL	1.16-1.52:1	2.3-3 m	50-10%	+/-30%	Manual
Fix Optional Lenses					
NP44ML-LK	0.32:1	0.6 m			No Zoom
NP11FL	0.81:1	1.6 m			No Zoom
Status	2017 Discontinued (EOL) // Last update of the data: 2025-04-07 Created: 2016-12-22 14:44:13				



More Details



HCinema

<https://www.projector-database.com/pro/necpa803u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.