EP719

The Ultra Bright Powerhouse





Brilliant Performance, Brilliant Price

The Optoma EP719 is an award-winning, versatile multimedia projector. From the boardroom to the classroom, the EP719 features 2200 lumens, sharp resolution and great contrast for a variety of environments. Designed for today's demanding multimedia needs, this sturdy DLP® digital projector lets your presentations shine.


- **Native XGA (1024 x 768)** resolution displays sharp images
- **2200 lumens** for bright pictures in a wide range of environments
- **2500:1 contrast ratio** for superior image quality and crisp details
- **SXGA+ (1400 x 1050)** resolution and HDTV compatibility
- **Advanced connectivity** including DVI w/HDCP, component, composite video and s-video inputs
- **Lightweight** at only 4.4 pounds

Optoma

www.OptomaUSA.com

EP719

Advanced DLP® Technology

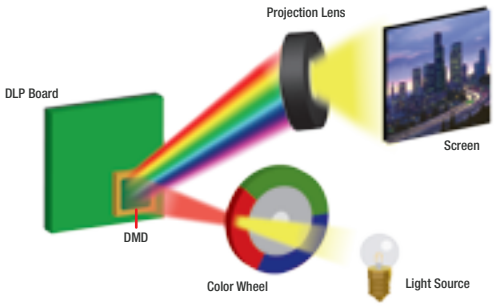


Enhanced Ventilation System



Remote Control



I/O Ports

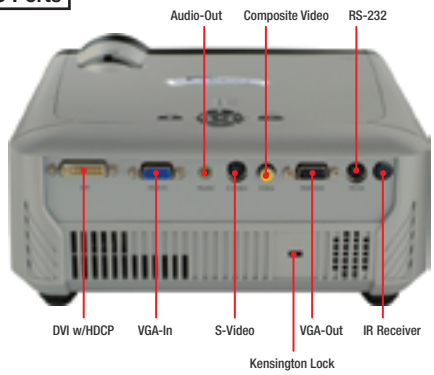

Specifications

Display Technology:	Single 0.55" DDR DLP® Technology by Texas Instruments
Resolution:	XGA (1024 x 768)
Maximum Resolution:	PC: SXGA+ (1400 x 1050)
Brightness (Typical)**:**	2200 Lumens
Contrast Ratio:	2500:1 (Full On/Full Off)
Lamp Life (STD/ECO)**:**	2000/3000 Hours
Lamp Type:	200W UHP
Throw Ratio:	1.93 - 2.13:1 (Distance/Width)
Image Size (Diagonal)**:**	24.6" to 300" (0.6 to 7.62 m)
Projection Distance:	3.9' to 32.8' (1.2 to 10 m)
Noise Level (STD/ECO)**:**	32dB/28dB
Remote Control:	IR Remote
Monitor Loop Through:	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
Computer Compatibility:	VGA, XGA, SVGA, SXGA + Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i)
Aspect Ratio:	4:3 Native, 16:9 Compatible
Projection Lens:	F=2.7-3.0, f=21.83-23.81 mm, 1.2:1 Manual Zoom and Focus
Audio:	One 2-Watt Speaker
Keystone Correction:	± 15° Vertical
Horizontal Scan Rate:	15 to 100 kHz
Vertical Refresh Rate:	56 to 85 Hz
Weight:	4.4 lbs (2.0 kg)
Dimensions (W x H x D)**:**	9" x 3.7" x 8.26" (230 x 95 x 210 mm)
Power Supply:	AC Input 100 - 240 V, Auto-Switching Power Supply
Power Consumption:	265 Watts (Maximum), <15 Watts (Standby Power)
Operating Temperature:	41 - 95ºF (5 - 35ºC) (80% Humidity), Adjustable Fan Speed for High Altitude Application
Displayable Colors:	16.7 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
User Controls:	Complete On Screen Menu Adjustments in 11 Languages
Security:	One Kensington® Lock Port
I/O Connectors:	DVI w/HDCP, VGA-In, VGA-Out, S-Video, Composite Video, Audio Mini-Jack, RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, Quick Start Guide, Warranty Card and User's Manual
Optional Accessories:	Ceiling Mount, VGA to Component Cable, S-Video Cable, Audio-Out Adapter, Gold Service Warranty and GrayWolfII™ Series Screens
Warranty:	1 Year Limited Parts and Labor, 90 Days on Lamp
UPC:	796435 11 607 1

Data-719-005-062507

HIGH-DEFINITION TELEVISION HDTV MONITOR

DVI HDCP COMPLIANT

Available from:

PICTURE BY DLP TEXAS INSTRUMENTS

Optoma

www.OptomaUSA.com

All Specifications are subject to change without notice.
© 2007 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.