
# Optoma ES531




| | | | |
|---|---|---|---|
| Brief Introduction<br>Beta 2.5 | The standard portable ES531 DLP has 2800 Ansi lumens, a contrast of 3000:1 and an SVGA 800 x 600 resolution. The projector can illuminate an image width of up to 461 cm with its 2800 Ansi lumens. In room light, however, the image width should ideally be less than 307 cm. The model is also Full HD 1080P compatible. The operating noise of just 30 decibels makes the projection quiet. The model built in 2008 is no longer offered by Optoma. | | |
| Display Type | 1 x 0,55" DC3 DLP Chip<br>SVGA 4/3 Ti Digital Light Processing Chip | | |
| | Projector | | Screen |
| Ansi-Lumen | 2800 | | 933 Lux (bei 200 cm Screen) |
| Contrast | 3000:1 full on/off | | 3000:1 full on/off |
| Black Level | 0,9333 min. Lumen | | 0,311 min. Lumen |
| Offset | | | |
| Resolution | SVGA 800 x 600<br>480.000 Pixel<br>SXGA+ 1400 x 1050 compressed | | |
| Video Modes | PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p | | |
| Application | Standard-Portabel \| External training and company presentations, as well as product presentations.<br>Medium screen width or rooms with little light, max. 100 lumens. | | |
| Light Source | 180W Lamp<br>Articel Nr.: BL-FP180D /<br>DE.5811116037-S | | |
| Light Life | 3000 h. 4000 h. in Eco Mode | | |
| Operating Costs | - | | |
| Focus | Manual | | |
| Zoom | Manual 1,1 | | |
| Objective | F=2,52-2,73 f=21,8-24 mm | | |
| Throw Ratio | 1,93-2,16:1 | | |
| Audio | 2W Mono | | |
| Connections | D-sub 15pin in<br>S-Video in<br>Cinch Video in<br>Cinch Stereo in<br>RS232C Din 9pin in<br>USB Maus | | |
| Ceiling Mounting | Yes | | |
| Power | 230W | | |
| Size WxHxD | 280 x 80 x 205 mm (11"x3,1"x8,1") 4,59 L/dm³ | | |

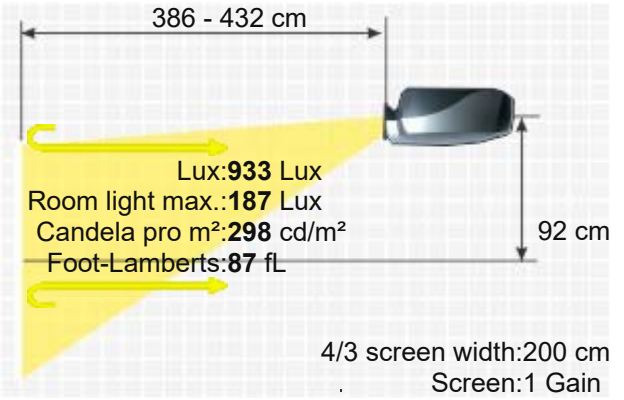


OPTOMA ES531

| | |
|---|---|
| Operating Noise | 30dB |
| Weight | 2,50 kg / 5,51 lbs. |
| Keystone | Vert.: +/-30° |
| Illumination | 85% |
| Frequenz | H-sync: 15,30-91,4 kHz<br>V-sync: 43-87 Hz |
| Foot-Lamberts | 87 fL / max. 461 cm screen width<br>298 cd/m² |




Features

- Full HD 1080P compatible
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Digital image shift
- Password protection
- Remote control with laser pointer und mouse control
- Overscan adjustable

Optional

| | |
|---|---|
| Bulb only | NLMP19111 |
| Lamp ruby | Ruby-LMP19111 |
| Lamp original | BL-FP180D / DE.5811116037-S |
| Compatible lamp | LMP-K19075 |
| Universal Remote original | Fernb-uni-V3 |
| Ceiling Mount 100-120 | Halterung100 |

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n21681

Status: 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data: Created: 2014-08-27 11:16:58

More Details: HCinema https://www.projector-database.com/pro/optomaes531-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.