

Optoma ZU1100

OPTOMA ZU1100



With the ZU1100, manufacturer Optoma offers a DLP laser projector with WUXGA 1920 x 1200 resolution and a contrast of 2000000:1. The manufacturer specifies a laser service life of 30000 hours, which is over 20.5 years with a daily viewing time of 4 hours. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. 995 cm image width, the projector will be able to illuminate well. The projector can manage rooms with residual light with a smaller image width, we recommend a maximum of 663 cm here. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Furthermore, it is Full HD 1080P and 3D compatible, and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection.



1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Projector 9600 / 11500 lumen
Screen 4267 Lux (bei 200 cm Screen)
2000000:1 full on/off
0,0048 min. Lumen
0,002 min. Lumen

WUXGA 1920 x 1200
2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Multicolor Laser (MCL)

Article Nr.: BR-3074W / SP.72N03GC01

30000 h.


0,00 € Laser

Powered

Powered

optional

optional

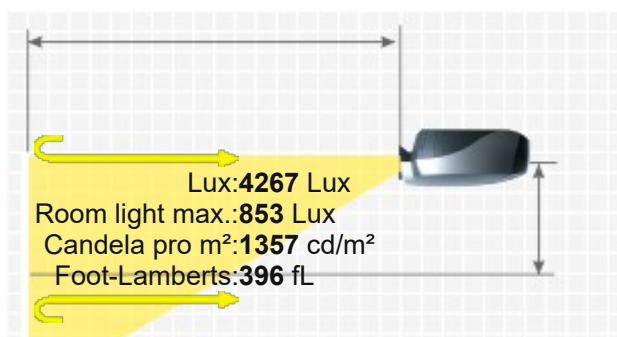

2x HDMI in
3D Sync in und out
HDBaseT
USB in
RS232C Din 9 pin in
RJ45 in
12V Trigger

Connections



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
360W
529 x 207,8 x 484 mm (20,8"x8,1"x19,1") 53 L/dm³
-

Weight
Keystone
Illumination

21,00 kg / 46,3 lbs.
Vert.: +/-20°
Hori.: +/-20°
-

Frequenz

-

Foot-Lamberts

396 fL / max. 995 cm screen width
1357 cd/m²
■ Real Full HD 3D
■ Full HD 1080P compatible
■ Direkt Power Off
■ Kensington Slot
■ Warping
■ 360° installable
■ 24/7 continuous operation capable

Features

■ Edge Blending
■ Picture-in-Picture
■ PJLink™
■ Lan network compatible.
■ Crestron®-Software compatible.
■ IP6X Airtight optical engine
■ Telnet
■ Full lens shift
■ Portrait mode
■ AMX

Screen Mirroring

-

Optional accessories

	Fernbedienung Original	BR-3074W / SP.72N03GC01	44,33 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
BX-CTA15	0.75-0.95:1	1.5-1.9 m	+/-120%	+/-40%	Powered
BX-CAA06, BX-CTA17	0.65-0.75:1	1.3-1.5 m	+/-120%	+/-40%	Powered
BX-CAA01, BX-CAA03, BX-CTA13	2.9-5.5:1	5.8-11 m	+/-120%	+/-40%	Powered

Fix Optional Lenses

BX-CTA16

0.36:1

0.7 m

NA-20%

+/-20%

No Zoom

Status

2022 Current model // Last update of the data: 2025-03-03

Created: 2022-08-09 10:43:44

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomazu1100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.