
OSCAL PV800Pro



Brief Introduction Beta 2.5	The PV800Pro at a glance: The OSCAL Standard Portable LED LCD Projector offers 1400 ANSI lumens and HDTV 1920 x 1080 resolution.
Display Type	1 x LCD Panel HDTV 16/9 Liquid Crystal Display
Projector Ansi-Lumen	1400
Contrast	-
Black Level	-
Offset	-
Screen Ansi-Lumen	622 Lux (200 cm Screen width)
Contrast	-
Black Level	-
Resolution	HDTV 1920 x 1080 2.073.600 Pixel UHD (4K2K) 3840 x 2160 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	LED
Light Life	30000 h.
Operating Costs	0,00 € LED
Focus	Automatic
Zoom	No Zoom 50%-100% Digital
Objective	-
Throw Ratio	1,29:1
Audio	2
Connections	HDMI in USB-A in Audio Mini Jack out Bluetooth 5.2
Ceiling Mounting	Yes, is possible.
Power	-
Size WxHxD	-
Operating Noise	35dB
Weight	-
Keystone	Vertical automatisch und horizontal
Illumination	-



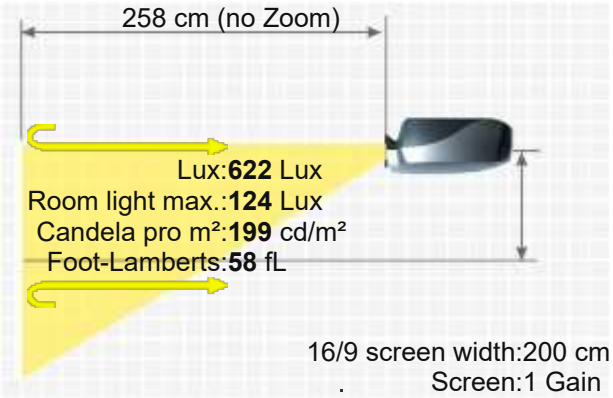

OSCAL PV800PRO



Frequenz	-
Foot-Lamberts	58 fL / max. 326 cm screen width 199 cd/m²
Features	■ Full HD 1080P compatible ■ Automatic and manual vertical keystone correction ■ High Dynamic Range (HDR) ■ Wi-Fi network compatible. ■ Widevine L1 ■ Google TV (Voice Assistant) ■ Auto 4P Keystone ■ Auto Obstacle Avoidance ■ Auto Screen Fit
Screen Mirroring	Miracast, Airplay, Windows, Chromecast
Status	2025 Current model // Last update of the data: 2026-03-09
Data	
More Details	HCinema https://www.projector-database.com/pro/oscalpv800pro-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.