
# Panasonic PT D5500E/U/L








| | |
|---|---|
| Brief Introduction<br>Beta 2.5 | With the PT D5500E/U/L, manufacturer Panasonic offers a stationary DLP projector with XGA 1024 x 768 resolution and a contrast of 1600:1. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a screen width of up to 616 cm thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 411 cm is recommended. With only 29 decibels of operating noise, the model is already very quiet compared to others. The projector was launched in 2004 and is no longer sold by the manufacturer, but is still very popular in our projector database. |
| Display Type | 1 x 0,7" DLP Chip<br>XGA 4/3 Ti Digital Light Processing Chip |
| Ansi-Lumen | Projector: 5000 / Screen: 1667 Lux (200 cm Screen width) |
| Contrast | Projector: 1600:1 full on/off / Screen: 1600:1 full on/off |
| Black Level | Projector: 3,1250 min. Lumen / Screen: 1,044 min. Lumen |
| Lens shift | Vert.: +50% -0% Hori.: +/-10% V motor H manuell |
| Resolution | XGA 1024 x 768<br>786.432 Pixel<br>UXGA 1600 x 1200 compressed |
| Video Modes | PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i, |
| Application | Stationary \| Permanent installation in the training room and meeting room as well as the conference room.<br>Wide screen width or rooms with plenty of light (over 200 lumens). |
| Light Source | 2 x 300W UHM Lamp<br>Article Nr.: ET-LAD55W |
| Light Life | 2000 h. |
| Operating Costs | - |
| Focus | Powered |
| Zoom | Powered 1,3 |
| Objective | F=1,7-2,0 f=25,6-33,8 mm / L optional |
| Throw Ratio | 1,79-2,37:1 |
| Audio | Nein |
| Connections | DVI-D in<br>D-sub 15pin in<br>5 x BNC RGBHV in<br>BNC Video in<br>S-Video in |

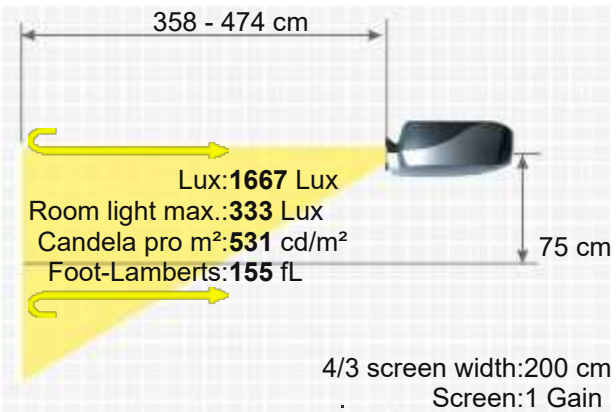


PANASONIC PT D5500E/U/L

| | |
|---|---|
| | RJ45<br>RS232C in und out<br> |
| Ceiling Mounting | Yes, is possible. |
| Power | 770W / 12W standby |
| Size WxHxD | 529 x 165 x 425 mm (20,8"x6,5"x16,7") 37,1 L/dm³ |
| Operating Noise | 29dB |
| Weight | 13,70 kg / 30,2 lbs. |
| Keystone | Vert.: +/-30° |
| Illumination | 90% |
| Frequenz | H-sync: 15-91 kHz<br>V-sync: 50-85 Hz |
| Foot-Lamberts | 155 fL / max. 616 cm screen width<br>531 cd/m² |
| Features | ■ Direkt Power Off<br>■ Lens shift Funktion V motor H manuell<br>■ Freeze<br>■ User logo<br>■ Eco Mode<br>■ Kensington Slot<br>■ 24/7 continuous operation capable<br>■ Picture-in-Picture<br>■ Password protection<br>■ Remote control with laser pointer und mouse control<br>■ Control via web browser<br>■ Lan network compatible.<br>■ The information on the standard lens in the German brochure is incorrect. |
| Screen Mirroring | - |
| Please note | The information on the standard lens in the German brochure is incorrect. |

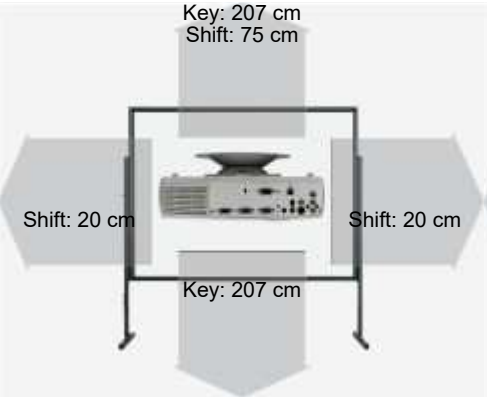


**Optional accessories**

| | | | |
|---|---|---|---|
|  | Einzel Nackte Lampe | NLMP16509 | 160,04 € |
|  | Doppel Lampe Ruby | Ruby-LMP4351 | 146,63 € |
|  | Einzel Lampe Ruby | Ruby-LMP16509 | 87,80 € |
|  | Doppel Lampe inkl. Luftfilter Original | ET-LAD55W | EOL € |
|  | Doppel Economy Lampe inkl. Luftfilter Original | ET-LAD55LW | EOL € |
|  | Economy Lampe Original | ET-LAD55L | EOL € |
|  | Einzel Lampe Original | ET-LAD55 | EOL € |
|  | Doppel Kompatible Lampe | LMP-K15360 | 140,79 € |
|  | Einzel Kompatible Lampe | LMP-K15359 | 87,64 € |
|  | Luftfilter Kompatibel | Alternative zu:ET-ACF100 | 50,28 € |
|  | Objektiv Gebraucht Original | ET-DLE200 | EOL € |
|  | Objektiv Gebraucht Original | ET-DLE400 | 1.235,64 € |
| | Fernbedienung Original | N2QAEA000023 | EOL € |

| | | | |
|---|---|---|---|
|  | Luftfilter Original | ET-ACF100 | EOL € |
|  | Deckenhalterung 220 | Halterung45 | 83,60 € |

Optional Lenses

| Name | Ratio | Distance | Shift V | Shift H | Zoom |
|---|---|---|---|---|---|
| ET-DLE400 | 5.8-8.13:1 | 1160-1626 m | 50% | +/-10% | Powered |
| ET-DLE300 | 3.84-6:1 | 768-1200 m | 50% | +/-10% | Powered |
| ET-DLE200 | 2.45-4.02:1 | 490-804 m | 50% | +/-10% | Powered |
| ET-DLE100 | 1.34-1.81:1 | 268-362 m | 50% | +/-10% | Powered |
| ET-DLE050 | 0.84:1 | 168 m | 0.0% Fix | +/-10% | No Zoom |

Status 2004 Discontinued (EOL) // Last update of the data: 2026-06-09

Data



More Details

HCinema

https://www.projector-database.com/pro/panasonicptd5500-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.