
Premier PD-S610



Brief Introduction Beta 2.5	The standard portable PD-S610 DLP has 1500 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. The projector can illuminate an image width of up to 337 cm with its 1500 Ansi lumens. In room lighting, however, the image width should ideally be less than 225 cm. On the market since 2005, the model is no longer offered by the manufacturer Premier.
Display Type	1 x 0,55" DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1500 / Screen: 500 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 full on/off / Screen: 2000:1 full on/off
Black Level	Projector: 0,7500 min. Lumen / Screen: 0,25 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	-
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	-
Throw Ratio	-
Audio	1 x 2W
Connections	D-sub 15pin in S-Video in Cinch Video in
Ceiling Mounting	-
Power	250W
Size WxHxD	265 x 90 x 202 mm (10,4"x3,5"x8") 4,82 L/dm³
Operating Noise	34dB

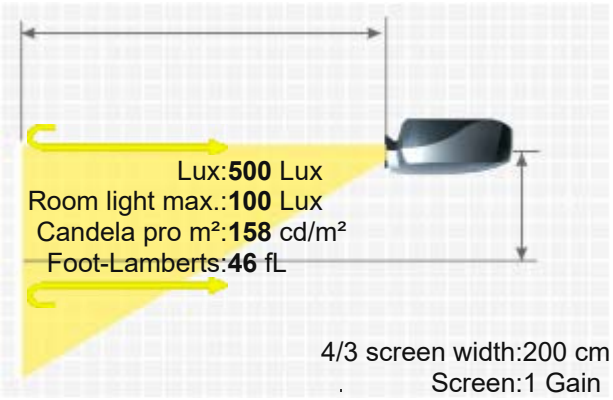

Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	-
Foot-Lamberts	46 fL / max. 337 cm screen width 158 cd/m²
Features	-
Status	2005 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

PREMIER PD-S610

More Details

HCinema

https://www.projector-database.com/pro/premierpds610-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.