
Premier PD S690



Brief Introduction Beta 2.5	The Premier PD S690 DLP projector has 30 Ansi lumens, a contrast of 1000:1 and an SVGA 800 x 600 resolution. The operating noise of just 30 decibels makes the projection quiet. The model was built by Premier in 2006 and is no longer current.
Display Type	1 x 0,55" DDR DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	30
Projector: Contrast	1000:1 full on/off
Projector: Black Level	0,0300 min. Lumen
Projector: Offset	-
Screen	10 Lux (bei 200 cm Screen) 1000:1 full on/off 0,01 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Game-Portabel | Very portable, small-screen projections. Very narrow picture width and rooms with very little light.
Light Source	-
Light Life	5.000 h.
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	-
Throw Ratio	-
Audio	1 x 0,3W
Connections	D-sub 15pin in Cinch Video in S-Video in SD card slot
Ceiling Mounting	Yes
Power	19W
Size WxHxD	121 x 47 x 99 mm (4,8"x1,9"x3,9") 0,56 L/dm³
Operating Noise	30dB
Weight	0,460 kg / 1,01 lbs.
Keystone	Vert.: +/-15°
Illumination	85%



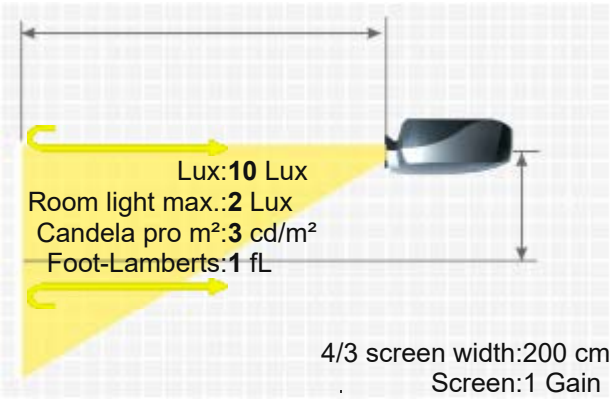

Frequenz	H-sync: 15-100 kHz Range max.: 230 MHz
Foot-Lamberts	1 fL / max. 48 cm screen width
	3 cd/m²
Features	-
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/premierpds690-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.