
Premier PD X750



Brief Introduction Beta 2.5	The standard portable Premier PD X750 DLP projector has 3000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. In room light, the image should be max. 318 cm wide. The projector was launched in 2006 and is no longer sold by the manufacturer.
Display Type	1 x 0,7" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3000 / Screen: 1000 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 full on/off / Screen: 2000:1 full on/off
Black Level	Projector: 1,5000 min. Lumen / Screen: 0,501 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	-
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	-
Throw Ratio	-
Audio	1 x 2W
Connections	D-sub 15pin in S-Video in Cinch Video in RS232C
Ceiling Mounting	-
Power	300W
Size WxHxD	253 x 97 x 201 mm (10"x3,8"x7,9") 4,93 L/dm³
Operating Noise	-

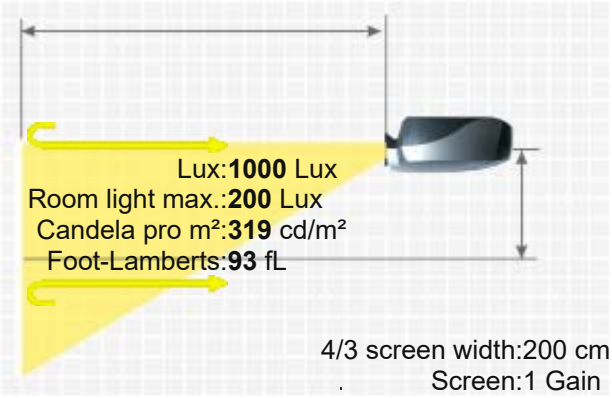

Weight	3,00 kg / 6,61 lbs.
Keystone	Vert.: +/-15°
Illumination	80%
Frequenz	-
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ 4-segment colour wheel
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/premierpdx750-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.