
Primax PLZ 933



D-ILA

Brief Introduction Beta 2.5	With the PLZ 933, manufacturer Primax offers a standard portable DILA projector with SXGA+ 1365 x 1024 resolution and a contrast of 800:1. 1100 Ansi lumens ensure that a picture width of 289 cm is also possible. However, if room light is available, the picture should be max. 193 cm wide. It is no longer offered by the manufacturer Primax.
Display Type	3 x 0,9" D-ILA SXGA 4/3 Direct-Drive Image Light Amplification (D-ILA)
Ansi-Lumen	Projector: 1100 / Screen: 367 Lux (bei 200 cm Screen)
Contrast	Projector: 800:1 full on/off / Screen: 800:1 full on/off
Black Level	Projector: 1,3750 min. Lumen / Screen: 0,46 min. Lumen
Offset	-
Resolution	SXGA+ 1365 x 1024 1.397.760 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W UHP Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,25
Objective	F=2,5 f=36-45 mm
Throw Ratio	2,02-2,52:1
Audio	-
Connections	DVI in D-sub 15pin in 2 x Cinch Video in S-Video in RS232C Mini Jack
Ceiling Mounting	-
Power	-
Size WxHxD	293 x 136 x 350 mm (11,5"x5,4"x13,8") 13,95 L/dm³
Operating Noise	-
Weight	5,80 kg / 12,79 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	34 fL / max. 289 cm screen width 116 cd/m²
Features	De-interlacer with 3:2 and 2:2 pull down.

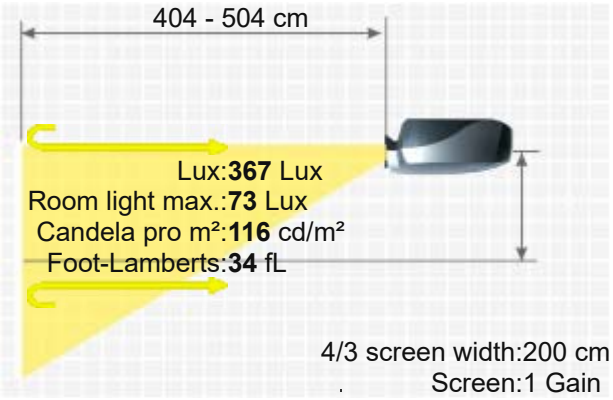

PRIMAX PLZ 933

Status - Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details



HCinema

https://www.projector-database.com/pro/primaxplz933-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.