

Prolight PLF600VX



Brief Introduction

Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

1700

567 Lux (bei 200 cm Screen)

Contrast

450:1 full on/off

450:1 full on/off

Black Level

3,7778 min. Lumen

1,268 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

165W Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,23

Objective

F=1,7-2,1 f=26-32 mm

Throw Ratio

2,03-2,5:1

Audio

1 x 2W

Connections

D-sub 15pin in und out
Cinch Video in
S-Video in
Mini Jack
RS232C

Ceiling Mounting

Yes

Power

230W

Size WxHxD

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

Operating Noise

37dB

Weight

3,10 kg / 6,83 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-80 kHz
V-sync: 43-85 Hz

Foot-Lamberts


53 fL / max. 359 cm screen width
182 cd/m²

Features

-

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

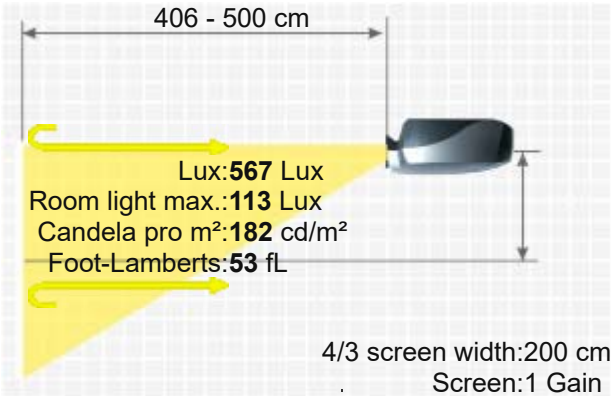

P R O L I G H T P L F 6 0 0 V X

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF600VX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.